


CERTIFIED RECORD OF LAND CORNER MONUMENTATION.

History of original corner establishment:

Corner established in 1881 by H.D. Gradon & B. Robb
Set stone 24"X16"X12" for corner to Section 1, 2, 11 & 12
from which:

- a pine, 20" in diam, bears N20⁰W, 99 lks.
- a pine, 10" in diam, bears N12⁰E, 65 lks.
- a pine, 6" in diam, bears S50⁰E, 15 lks.
- a pine, 7" in diam, bears S23⁰W, 29 lks.

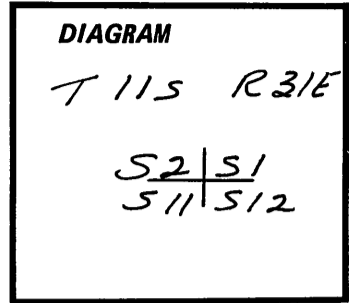

Description of corner evidence found:

Found original bearing trees
48" P.Pine, N14⁰W, 65.4', Scribing visible, S2
36" P.Pine, N19⁰E, 43.0', Scribing visible, 31

Found original stone 24"X16"X12"

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 2½" Brass Cap on 2" galvanized pipe 30" long & buried 18" in ground with mound of stone to cap. Original stone buried along side monument.

New Bearing Trees:

- 10" Fir, N36⁰W, 6.8', Scribed T11S, R31E, S2, B.T.
- 10" Fir, N50⁰E, 13.6', Scribed T11S, R31E, S1, B.T.
- 7" Black Pine, S14⁰E, 136.5', Scribed T11S, R31E, S12, B.T.
- 6" Black Pine, S47⁰W, 62.9', Scribed T11S, R31E, S11, B.T.

All B.T.'s have sign 54-4 & 54-3 attached. Set steel guard post with 54-9 sign. Painted red band around bearing trees. Tagged trees with L.S. 980 washer.


MONUMENT STAMPED:

Witnesses: David Scott, Party Chief
Harold Pavey, Chainman

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Edgar W. Graves

OREGON
JULY 14, 1972
EDGAR W. GRAVES
980

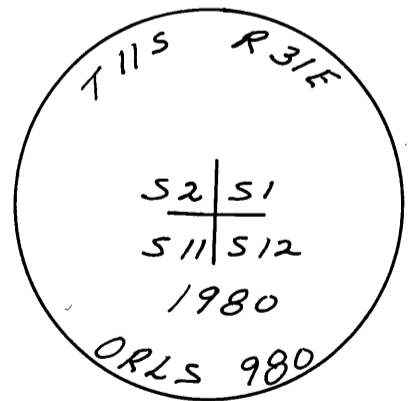

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 3 day of Oct, 1980
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)