


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1881 by H.D. Gradon & B. Robb  
Set stone 18"X12"X10" for corner to Section 11, 12, 13 & 14  
from which:

- a black pine, 6" in diam., bears N50°W, 179 lks.
- a black pine, 13" in diam., bears N72°E, 142.1ks.
- a black pine, 10" in diam., bears S85°E, 82 lks.
- a black pine, 10" in diam., bears S24°W, 108 lks.

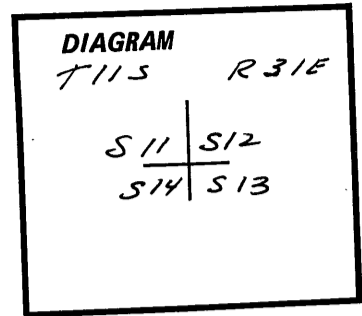

Description of corner evidence found:

None

Description of monument and accessories established to perpetuate the original location of this corner:

Set 3" Aluminum cap on 2½" Aluminum pipe 30" long & buried 18" in ground with mound of stone to cap.

New Bearing Trees:

- 6" Black Pine, N15°W, 231.8', Scribed T11S, R31E, S11, B.T.
- 10" Black Pine, N70°E, 61.6', Scribed T11S, R31E, S12, B.T.
- 8" Black Pine, S31°E, 66.0', Scribed T11S, R31E, S13, B.T.
- 6" Black Pine, S41°W, 172.0', Scribed T11S, R31E, S14, B.T.

All B.T.'s have sign 54-4 & 54-3 attached. Set steel guard post with 54-9 sign, 4' north of monument.  
Painted red band around bearing trees.  
Tagged trees with L.S. 980 washer.


MONUMENT STAMPED:

Witnesses: David Scott, Party Chief  
Harold Pavey, Chainman

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Edgar W. Graves*

OREGON  
JULY 14, 1972  
EDGAR W. GRAVES  
980

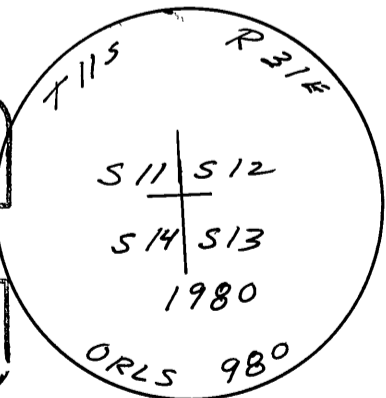

Office of..... *Surveyor* ..... County of..... *Grant* .....  
State of..... *Ore* ..... I hereby certify that the within instrument was filed in this office  
for record on the..... *3* ..... day of..... *OCT* ..... 19..... *80* .....  
*Robert W. Sayre* by .....  
(COUNTY OFFICIAL) (DEPUTY)