

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


INDEX No. P-9

History of original corner establishment:

Corner is originally established by H.D. Gradon, in 1881, under General Land Office Contract No. 383. Surveyor Generals Notes State: Set Stone 12x12x6 for 1/4 Sec. Cor.

From Which:

A pine 9 ins dia., bears N82°E., 19 lks. dist.
" " 9 " " " N81°W., 25 " "

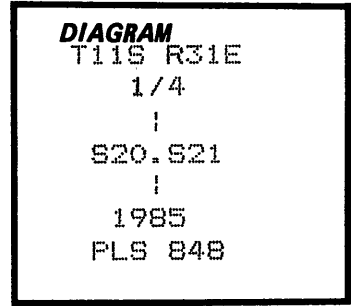

Description of corner evidence found:

No Evidence found, N-S fence runs through the corner area. Corner falls on the West edge of Keeney Meadows.
No Evidence of original Bearing Trees found.
Corner has been lost to fencing and cultivation in Keeney Meadows. Locus is determined by proportionate measure, between corners found 1/2 mi. North & South.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2-1/2"x30" aluminum pipe with 3-1/2" aluminum cap, stamped as shown on the **DIAGRAM**, SET 18" in the ground & raised a mound of stone & earth around the pipe.
From Which:
A Lodgepole Pine, 14" dia., Bears, S54°E., 52.7 ft., scribed: 1/4 S21 BT
A Lodgepole Pine, 8" dia., Bears, S25°W., 55.6 ft., scribed: 1/4 S20 BT
Measurements to trees taken with a metal tape and magnetic compass, with Declination set off 20 deg. East.
Nailed a brass washer stamped PLS 848 on blaze above BT scribe, Bearing Tree Sign above blaze, and warning sign on back of each tree. Painted a 6" red band at breast ht. around each tree. Set steel fence posts with warning & Boundary Signs, North & South 4 ft. from the corner.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

[Signature]
OREGON
JULY 12, 1988
DOUGLAS M. FERGUSON
848

This work is performed by:
Douglas M. Ferguson PLS 848
Mt. Vernon Oregon.
On: Sept. 25, 1985
Refer to Map of Survey No. 906

Office of..... *Surveyor* County of..... *Grant*
State of..... *Oregon* I hereby certify that the within instrument was filed in this office
for record on the *28* day of *Dec* , 19*85*
Robert D. B. Jett by
(COUNTY OFFICIAL) (DEPUTY)