


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Set by Bamford Robb and Herman D. Gradon in 1881 under their joint contract no. 383, dated March 26, 1881.

Set stone 18x10x4 for closing corner from which a pine 36 in. diam. bears S.40°W. 38 lks. dist.; A pine 28 in. diam bears S.40°E. 95 lks. dist. Frank J. Van Winkle in his 1917 survey reports "I find the cor. stone 20x12x6 ins. mkd CC on one face with 6 notches on two other and opposite faces, lying loosely on the ground about 30 lks. S. of the Standard Parallel and at a point not facing either of the bearing trees. Proportional to the original field note distances and in the parallel. At 82.89 chs from the NE cor. of secs. 6, which is 8.05 chs from the SW cor. of sec. 31, Set the original stone firmly in the ground with CC on N. face and notches on E. and W. faces; from which the original bearing trees, pine 27 ins. dia. bears S.48°E. 96 lks. dist. mkd T11S R34 E S6 BT; pine 35 ins. dia. bears S.30°W. 32 lks. dist. mkd T11S R 33 E S BT. This point for the CC faces the marks on the BT's and more nearly answers the calls of the original notes than any point not in the parallel." George W. Root in his survey of HES 252 in 1922 reports "a stone 10x7x6 ins. above ground, firmly set, marked, and witnessed as described by the Surveyor General."




Description of corner evidence found:

A 20x12x6 inch stone with CC on one face and six notches on two other opposite faces in a mound in the Standard Parallel as reported by Van Winkle. Also the two original bearing trees, a 36" pine (35" in 1917 and now 38") with CCT11SR33ES1 still visible and the remains of the 28" pine (27" in 1917) which is now down and partially barkless and 24" in diameter with some evidence of scribing.

Description of monument and accessories I established to perpetuate the original location of this corner:

Since I found the stone to be on the Standard Parallel and in concert with the record of Van Winkle, and since I, just as Van Winkle, cannot find a location for the corner that better fits the calls of the original notes I accept this location as the position of the closing corner.

In place of the stone I set a standard 3½" diameter aluminum cap, with magnet attached to underside, mounted on a 2" diameter by 30" long aluminum pipe. I surrounded the monument with a mound of stone and stamped the cap as shown.

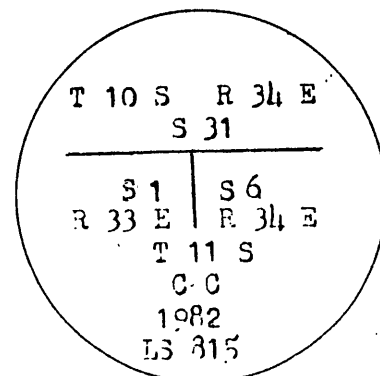

I buried the original stone "upside down" alongside the monument and I took a new bearing tree, a 6" pine which bears S.25°E., 80.6 feet which I scribed T11SR34ES6CCBT. The original 36" pine (now a 38") bears S.30°W., 23.5 feet and the original 28" pine, now down and partially barkless, as best as can be determined, would bear S.50°E., 65 feet.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*18*..... day of.....*Jan*....., 19.....*85*
.....*Robert D. Buzett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)

OREGON
JULY 14, 1967
WM. F. RINGNALDA
815