


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Set by Frank J. Van Winkle in 1917 (the reason for this survey is not readily apparent in the records).

Set a stone 10x8x6 ins. mkd 1/4 6 on S. face; from which pine 15 ins. dia. bears S.39 1/2 E. 250 lks. dist. mkd 1/4 S6 BT; Pine 18 ins. dia bears S.2 1/2 W. 159 lks. dist. mkd 1/4 S6 BT.




Description of corner evidence found:

A stone, 4" above ground on the standard parallel, marked 1/4 6 on the South face. The stone measures 10x8x6 inches and is apparently the original as set by Van Winkle although the bearing trees are gone therefore I accept this stone as being the correct position for the corner.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of the stone I set a standard 3 1/4" diameter aluminum cap, with magnet attached to underside, mounted on a 2" diameter by 30" long aluminum pipe. I surrounded the monument with a mound of stone and stamped the cap as shown.

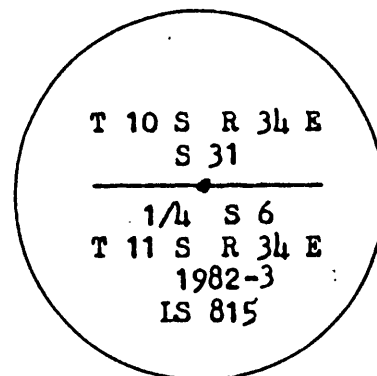

The original stone I have placed upside down as a part of the base of the stone mound and I took a 34" pine which bears S.62 W., 117.7 feet as a bearing tree and scribed it 1/4 S6BT and not having another tree available I set a 5/8"x30" iron rod S.89 E., 21.83 feet as a reference. The rod has a plastic cap marked RM LS815 21.83'.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Wm. F. Ringnalda

OREGON
JULY 14, 1967
WM. F. RINGNALDA
815

Office of.....*Surveyor*..... County of.....*Grant*.....
 State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
 for record on the.....*8* day of.....*Jan*....., 19.....*85*.....
Robert D. Bayne by
 (COUNTY OFFICIAL) (DEPUTY)