


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Set by Frank J. Van Winkle in 1917 (the reason for this survey is not readily apparent in the records).

Set a stone 22x11x9 ins. near the E. edge Boulder Creek mkd. 1/16 on W. face; from which pine 36 ins. dia. bears S.48° E. 57 lks. dist. mkd. 1/16 S 5 BT; Balm 9 ins. dia. bears S.71½° W. 62 lks. dist. mkd. 1/16 S6 BT.

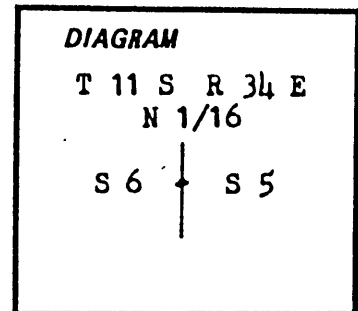


Description of corner evidence found:

A 36" pine stump with BT facing NW and a 36" Balm tree both of which appear to be Van Winkle's original trees. I find no evidence of the original stone. (The position of the corner according to the recorded bearings and distances from the trees falls in a man made channel on the East bank of Granite Boulder Creek).

Description of monument and accessories | established to perpetuate the original location of this corner:

Having previously determined a position for this corner by proportionate measure between the 1/4 corner to the South and the Closing Corner and now finding that Van Winkle's Bearing Trees establish the same position I adopt this for the true corner position. *

Since the true corner falls in the channel I set a standard 3½" diameter aluminum cap, with magnet attached to under-side, mounted on a 2" diameter aluminum pipe at a point on the section line, 170.00 feet N.0°0'4."E. of the true corner, as a witness corner. The monument is surrounded by a mound of stone and is stamped as shown. From this monument a 6" Pine bears S.35° W., 45.5 feet and another 6" Pine bears N.79° W., 35.2 feet, both of which I have scribed WCN 1/16S6BT.

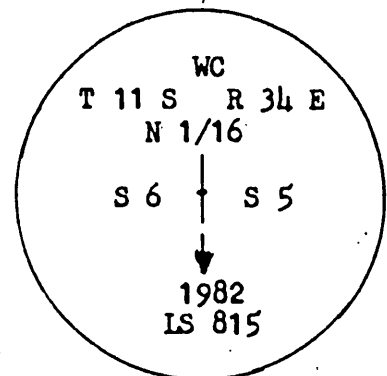

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Wm. F. Ringnald

OREGON
JULY 14, 1917
WM. F. RINGNALDA
815

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*18* day of.....*Jan*....., 19..*85*..
.....*Robert P. Duggett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)