


CERTIFIED RECORD OF LAND CORNER MONUMENTATION.

History of original corner establishment:

None




Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

The position of this corner is established by proportionate measure based upon the supplemental plat of old Lot 3 of Section 5.

At the corner position I set a standard 3 1/4" diameter aluminum cap, with magnet attached to underside, mounted on a 2" diameter by 30" long aluminum pipe. I surrounded the monument with a mound of stone and stamped the cap as shown.

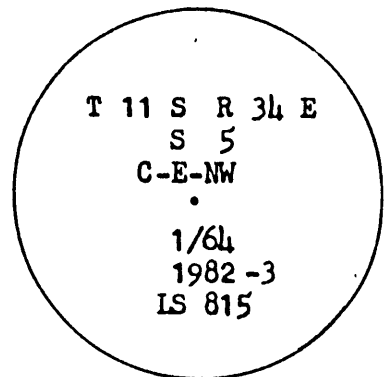

I took a 13" pine which bears N.86°E., 69.0 feet and another 13" pine which bears S.36°E., 63.9 feet for bearing trees and scribed each of them 1/64 S5BT.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bugh

OREGON
JUL 16 1987
W. F. BINGNALDA
815

Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 18 day of Jan, 1985
Robert D. Bugh by _____
(COUNTY OFFICIAL) (DEPUTY)