


CERTIFIED RECORD OF LAND CORNER MONUMENTATION.

History of original corner establishment:

Set by Frank J. Van Winkle in 1917 (the reason for this survey is not readily apparent in the records).

Set a stone 16x12x8 mkd. 1/16 on N face; from which pine 20 ins. dia. bears S.36 $\frac{1}{2}$ ° E. 12 lks. dist mkd. 1/16 S6 BT; Fir 5 ins. dia. bears N.30 $\frac{1}{2}$ ° W. 37 lks. dist. mkd. 1/16 S6 BT.




Description of corner evidence found:


A 16x12x8 inch stone marked 1/16 on the North face and a 22" stump with a bit of scribing visible 8.7 feet S.36 $\frac{1}{2}$ ° E., and a 20" fir with a totally healed face, 24.5 feet N.31° W. All of these are apparently the originals as set by Van Winkle.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of the stone I set a standard 3 $\frac{1}{4}$ " diameter aluminum cap, with magnet attached to underside, mounted on a 2" diameter by 30" long aluminum pipe. I surrounded the monument with a mound of stone and stamped the cap as shown.

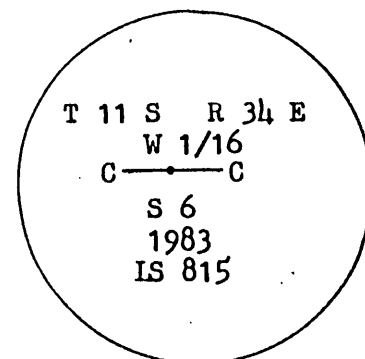

The original stone I have placed face down on the North side of the monument where it forms a part of the base of the stone mound. I took a 10" fir which bears S.65° E., 5.0 feet as a new bearing tree and scribed it CW 1/16S6BT.

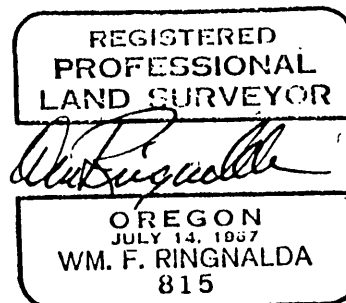

Office of.....*Surveyor*..... County of.....*Grant*.....  
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office  
for record on the.....*12*..... day of.....*Jan*....., 19.....*85*.....  
.....*Robert D. Baggett*..... by.....  
(COUNTY OFFICIAL) (DEPUTY)