


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Set by Frank J. Van Winkle in 1917 (the reason for this survey is not readily apparent in the records).

Set a stone 16x9x5 ins. mkd. 1/16 on N face from which Pine 11 ins. dia. bears N.67°W. 46 lks. dist. mkd. 1/16 S5 BT; Pine 15 ins. dia. bears S.6°W. 229 lks. dist. mkd. 1/16 S5 BT.

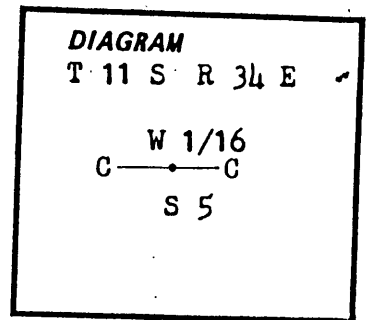


Description of corner evidence found:

After a diligent search I found no evidence of the original monument or its accessories.


Description of monument and accessories I established to perpetuate the original location of this corner:

I establish this corner at one half the distance between the West and Center 1/4 corners and on the line between the position of the CWW 1/64 corner and the center 1/4 corner.

At the corner position I set a standard 3/4" diameter aluminum cap, with magnet attached to underside, mounted on a 2" diameter by 30" long aluminum pipe. I surrounded the monument with a mound of stone and stamped the cap as shown.

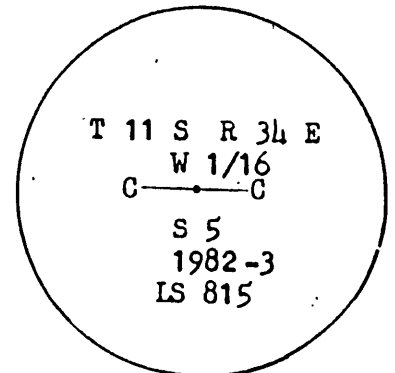

I took an 8" pine which bears S.59°E., 136.2 feet and a 15" pine which bears N.7°E., 145.5 feet as bearing trees and scribed each of them CW 1/16S5BT.

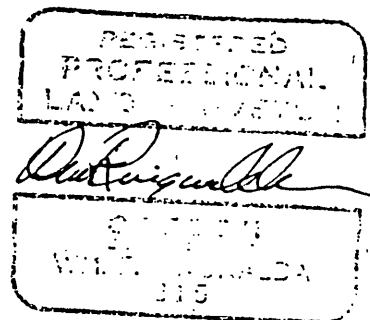

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*18* day of.....*Jan*....., 19*85*.....
Robert H. Blagden by.....
(COUNTY OFFICIAL) (DEPUTY)