


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Set by Frank J. Van Winkle in 1917 (the reason for this survey is not readily apparent in the records).

Mark rock bench on E. side of rock spur x $\frac{1}{4}$ from which pine 15 ins. dia. bears N.75°E. 34 lks. dist. mkd. $\frac{1}{4}$ S5 BT; Pine 26 ins. dia. bears S.29 $\frac{1}{2}$ °E. 70 lks. dist. mkd. $\frac{1}{4}$ S5 BT; Pine 24 ins. dia. bears S.43°W. distance not measurable, mkd. $\frac{1}{4}$ S5 BT.


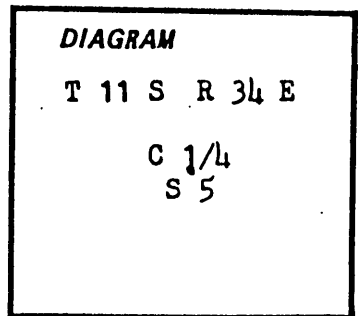


Description of corner evidence found:

A cross chiseled in a rock ledge with 1/4 chiseled in the NE Quadrant and a 31" pine with scribing visible 46.0 feet S.31°E. These are apparently Van Winkle's work.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the center of the cross I set a 3" diameter brass disk, stamped as shown, with its stem grouted into a drill hole and I took a 27" pine which bears N.41°E., 53.7 feet as a new bearing tree and scribed it C 1/4S5BT. 1.85 feet S.75°E., is a brass disk firmly grouted into a lower rock shelf which erroneously set in 1982. I was unable to remove this disk so I defaced the markings other than the date.

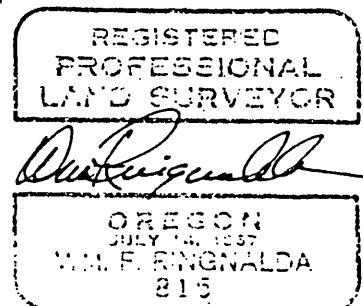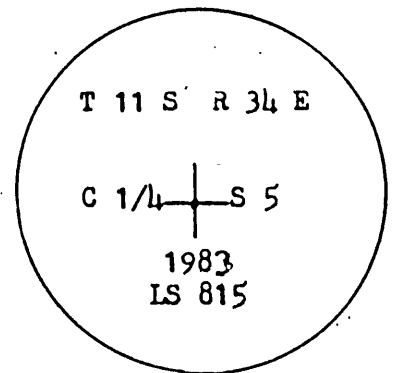

Office of.....*Surveyor*..... County of.....*Grant*.....
 State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
 for record on the.....*18* day of.....*Jan*....., 19.....*85*.....
*Robert H. Sargent*..... by
 (COUNTY OFFICIAL) (DEPUTY)