


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Set by Frank J. Van Winkle in 1917 (the reason for this survey is not readily apparent in the records).

Set a stone 14x12x5 ins. mkd. 1/16 on N face; from which Pine 40 ins. dia. bears N.50°E., 103 lks. dist. mkd. 1/16 S5 BT; pine 14 ins. dia. bears S.78°E. 127 lks. dist. mkd. 1/16 S5 BT.

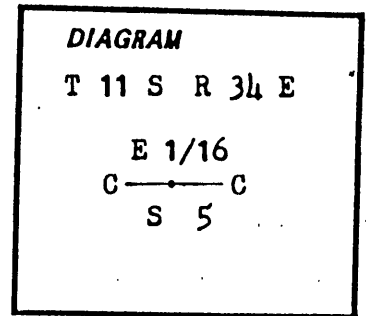


Description of corner evidence found:


A 12x16x8 inch stone with 1/16 marked on North face and a 54" pine with a nearly healed face 68.0 feet N.50°E., and a 22" pine with scribing still visible 8.40 feet S.78°E. These are all apparently Van Winkle originals. I also find alongside the stone a 5/8" iron rod with a yellow plastic cap for which I have no history or other identification.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of the stone I set a standard 3 1/4" diameter aluminum cap, with magnet attached to underside, mounted on a 2" diameter by 30" long aluminum pipe. I surrounded the monument with a mound of stone and stamped the cap as shown.

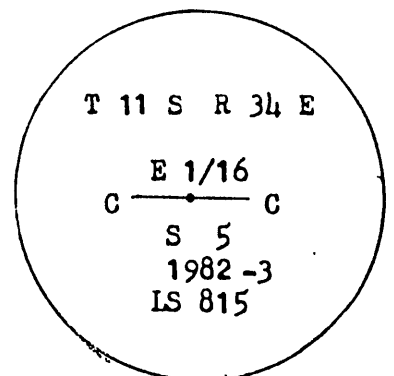

I placed the original stone alongside the monument, face down, as a part of the base of the stone mound.

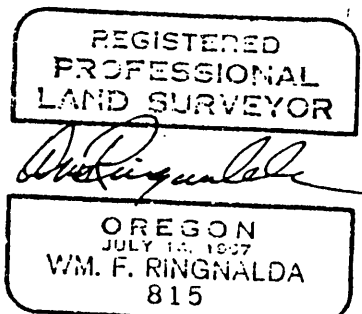

Office of.....*Surveyor*..... County of.....*Grant*.....
 State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
 for record on the.....*18* day of.....*Jan*....., 19.....*85*.....
 by.....*Robert D. Bluff*..... (COUNTY OFFICIAL) (DEPUTY)