

CERTIFIED RECORD OF LAND CORNER MONUMENTATION.

History of original corner establishment:

Set by Frank J. Van Winkle in 1917 (the reason for this survey is not readily apparent in the records).

Set a stone 14x13x7 ins., mkd. 1/16 on W. face, from which Pine 36 ins. dia. bears S.26°E. 26 lks. dist. marked 1/16 S5 BT; Pine 15 ins. dia. bears N.60½°W. 134 lks. dist. mkd. 1/16 S5 BT.

DIAGRAM

```

T 11 S R 3¼ E
      C
S 1/16 — S 5
      C
    
```



Description of corner evidence found:

A 14x12x7 inch stone with 1/16 on the West face and the stump of a 36" Pine, scribed 1/16 S5BT, 19.2 ft. S.26°E. from the stone, which matches the calls in Van Winkle's notes.

Description of monument and accessories established to perpetuate the original location of this corner:

In place of the stone I set a standard ¾" diameter aluminum cap, with magnet attached to underside, mounted on a 2" diameter by 30" long aluminum pipe. I surrounded the monument with a mound of stone and stamped the cap as shown.

I place the original stone face down on the North side of the monument as a part of the base of the stone mound. I took a 10" Pine which bears N.26°E., 28.8 feet and a 15" Pine which bears N.60°W., 73.7 feet as new bearing trees and scribed each of them CS 1/16S5BT.

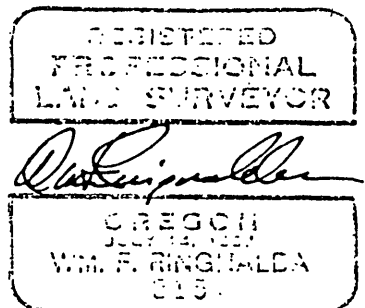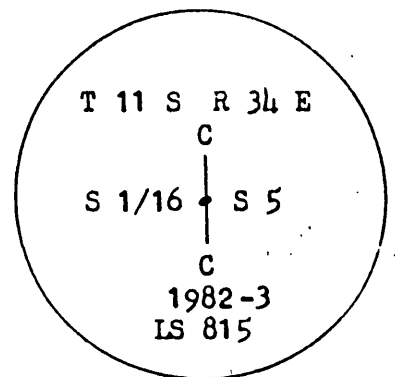

Office of.....*Surveyor*..... County of.....*Grant*.....
 State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
 for record on the.....*18*..... day of.....*Jan*....., 19.....*85*.....
*Robert D. Begett*..... by.....
 (COUNTY OFFICIAL) (DEPUTY)