


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Set by Frank J. Van Winkle in 1917 (the reason for this survey is not readily apparent in the records).

Set a stone 16x10x8 ins. mkd. 1/16 on W. face; from which fir 16 ins. dia. bears N.63½° W. 70 lks. dist. mkd. 1/16 S5 BT; fir 14 ins. dia. bears S.78° E. 112 lks. dist. mkd. 1/16 S5 BT.

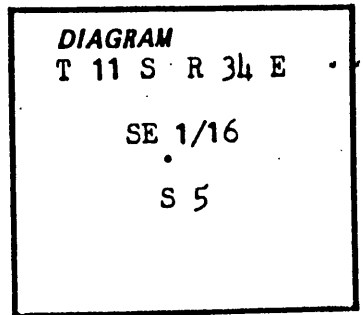


Description of corner evidence found:


A 16x10x8 inch stone with 1/16 on the West face and a 22" Fir with a well healed face 46.7 feet N. 61° W. Both of which appear to be original Van Winkle work.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of the stone I set a standard 3½" diameter aluminum cap, with magnet attached to underside, mounted on a 2" diameter by 30" long aluminum pipe. I surrounded the monument with a mound of stone and stamped the cap as shown.

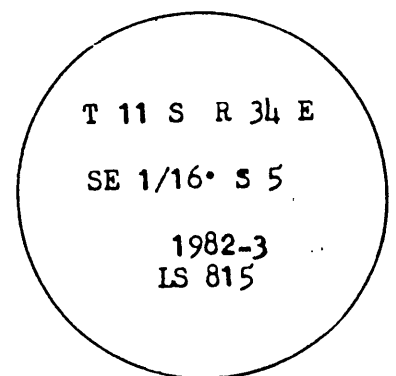

I placed the original stone face down on the North side of the monument where it is a part of the base of the stone mound. I took an 8" Fir which bears S. 73° W., 57.0 feet as a new bearing tree and scribed it SE 1/16 S5 BT.

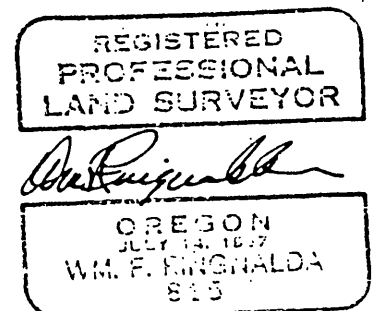

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*18*..... day of.....*Jan*....., 19.....*85*
Robert D. Edgett.....
(COUNTY OFFICIAL) (DEPUTY)