

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Set by Herman D. Gradon in 1881
under his contract no. 416 dated August 19, 1881.

Set a basalt stone 16x8x6 ins. 11 ins. in the ground,
marked with 5 notches on S. & E. edges; from which A fir
8 ins. diam. bears N.50°E. 41 lks. dist. marked
T11R34E S5 BT; A pine 36 ins. diam. bears S.65°E. 29 lks. dist. marked
T11SR34E S8 BT; A pine 24 ins. diam. bears S.55°W. 108 lks. dist., marked
T11SR34E S7 BT; A pine 24 ins. diam bears N.40°W. 83 lks. dist. marked
T11SR34E S6 BT.

Frank J. Van Winkle in his survey in 1917 reports "a stone 18x10x8 ins. set in
a mound of stone, mkd. with 5 notches on S and 5 notches on E edge; from which
Fir 17 ins. dia. bears N.51½°E. 41 lks. dist. mkd. T11SR34E S5 BT; Pine 27 ins.
dia bears S.69°E. 28 lks. dist. mkd T11SR34E S8 BT; Pine 30 ins. dia. bears
S.74°W. 107 lks. dist. mkd T11SR34E S7 BT; Pine 24 ins. dia. bears N.36½°W. 80
lks. dist. mkd. T11SR34E S5 BT."


Geo. W. Root in his survey of HES 252 in 1922 records "a basalt stone, 8x6x5 ins.
above ground, firmly set, marked, and witnessed as described by the Surveyor
General."

Description of corner evidence found:

A 16x8x6 inch stone with 5 notches on the SE edge from which: A 21" Pine snag
with evidence of scribing bears N.35°W., 52.0 feet, a 25" fir with a healed face
bears N.57°E., 28.5 feet, and a 31" Pine with some scribing visible bears S.65°E.,
22 feet. These trees appear to be the originals and the stone does not appear to
be disturbed so I ignore the minor discrepancies and accept the stone as being
in its original position.

Description of monument and accessories | established to perpetuate the original location of this corner:

In place of the stone I set a standard 3½" diameter alumi-
num cap, with magnet attached to underside, mounted on a
2" diameter by 30" long aluminum pipe. I surrounded the
monument with a mound of stone and stamped the cap as
shown.

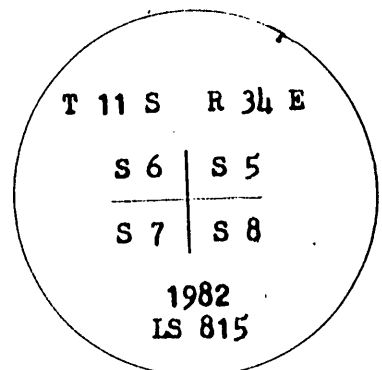

I buried the original stone upside down alongside the monument and took a 7"
Pine which bears S.66°W., 47.0 feet as a new bearing tree and scribed it
T11SR34ES7BT, and also took an 8" fir which bears N.38°W., 57.5 feet for another
and scribed it T11SR34ES6BT.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Wm. F. Ringnalda
OREGON
JULY 11, 1967
WM. F. RINGNALDA
815

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*18*..... day of.....*Jan*....., 19.....*85*.....
Robert E. Dwyer (COUNTY OFFICIAL) *Robert E. Dwyer* (DEPUTY)