


CORNER RESTORATION

CORNER N ¼
Sec. 13 TWP 11 RANGE 34

ORIGINAL SURVEY BY: WILLIAM GRADON

CONTRACT NUMBER: 416

CONTRACT DATE: 1881

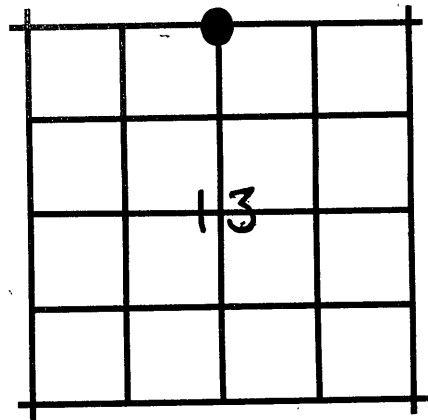

ORIGINAL DESCRIPTION:

Original 1881 Set basalt stone 14x10x5 inches 9 inches in ground for ¼ cor. marked ¼ on North Face. Mound of stone alongside, from which a 36" pine bears N. 35° E. 260 lks.

VANWINKLE 1917 (Recorded as Survey No. 665)

The corner and mound of stone are missing. Found original BT, a 38" pine marked ¼ S BT from which I run and measure S. 35° W. 260 lks. I set a stone 20x14x4 inches marked ¼ on North Face, built mound of stone N. of corner.

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
J. L. Watson

May 4, 1983

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1903
ROBERT D. BAGETT
598

RECEIVED AND
FILED

JUN 15 1983

OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
Attest: *W. J. Hamilton*

Grant County Surveyor

EVIDENCE FOUND:

A Basalt stone 20x14x4 lying loose on ground, marked ¼ on face N. 42° W. 8.49 ft. from established position. Set by VanWinkle, not orig. stone.

Original BT, a 36" pine, dead, down, no visible scribing - root hole bears N. 35° E. 171.6 feet from established position.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

I measure record bearing and distance from the center of original BT root hole, with true bearings. I set a 1½"x30" galv. iron pipe 22" in the ground with brass cap marked as shown. The position falls in an old skid trail which explains the displacement of Van Winkle's stone and the absence of the original stone. From established corner position I scribe

NEW BEARING TREES:

An 18" bull pine bears S. 78° W. 157.1 ft. marked T11SR34E¼S13 CSBT.

A 15" bull pine bears N. 9° W. 159.8 ft., marked T11SR34E¼S12 CSBT.

Buried Van Winkle's stone North and alongside iron pipe and raised a mound of stone, 4 ft. base to top of cap. Used mag. compass with 20° E. variation and steel tape, measuring to center of new bearing trees. Painted blazes and 6" band around new BTs with Red Timber marking paint.

MONUMENT MARKED

