


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original Survey by Eugene P McCormack under contract No 398 dated July 2 1881
 Set Basalt stone 14x12x10 ins 10 ins in the ground for cor to sects 1,6,7,& 12 marked with 1 notch on the N and 5 notches on the S edges from which
 A Pine 30 ins diam bears N 60° E 85 lks dist marked T11SR36ES6BT
 A Pine 24 ins diam bears S35° E 95 lks dist marked T11SR36ES7BT
 A Pine 8 ins diam bears S14° W 39 lks dist marked T11SR35ES12BT
 A Fir 8 ins diam bears N 45° N 88 lks dist marked T11SR35ES1BT

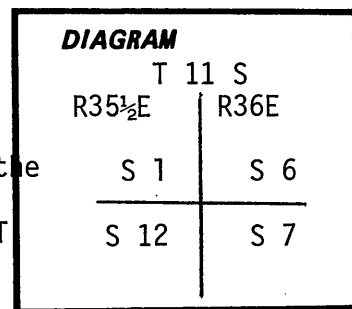

Retracement Survey was done by K. P. Cecil under group No 99 dated Oct 17, 1922
 At the corner of secs. 1,6,7, & 12 which is a basalt stone firmly set and mkd. as described by the surveyor General: the cor. is witnessed as follows which does not agree with the description furnished by the Surveyor General from the cor.
 A Pine 26 ins dia. bears N 22° W., 83 lks dist mkd. T11SR35½ES1BT (old BT)
 A Pine 34 ins dia. bears N 78° E., 45 lks dist mkd. T11SR36ES6BT (old BT)
 A Pine 12 ins dia bears S31° E., 20 lks dist mkd. T11SR36ES7BT (old BT)
 A pine 12 ins dia. bears S29° 30'N 33 lks dist mkd T11SR35½ES12BT (old BT)

Description of corner evidence found:

At the corner I found a basalt stone 14"x12"x10" with 1 notch on N and S notches on the S edges as described by E. P. McCormack and K. P. Cecil firmly set in the ground
 A rotting pine log and root hole bears S 30° E 13.2 ft marked R36 S7 BT
 A burnt pine log bears S 30° W 21.8 ft blazed no visible marks
 A sawed 34" pine stump bears N 80° E 29.7 ft blazed no visible marks

Description of monument and accessories I established to perpetuate the original location of this corner:

In the original stone location I set a 2½"x32" Brass capped Steel pipe 22" in the ground in a mound of stone the original stone buried along side as witnessed & set.

A 10" Lodgepole pine bears N28° 30'W 48.47 ft.
 marked T11SR35½ES1BT nail in W base

A 6" Larch bears N75° 30'E 28.23 ft
 marked T11SR36ES6BT nail in N base


A 5" White fir bears S29° 30'E 17.97 ft.
 marked T11SR36ES7BT nail in E base

A 4" Larch bears S70° 15'W 34.74 ft.
 marked "X" BT nail in S base

Bearings taken with a staff compass
 declination 18½° E as per 1980 Isogonic chart
 Distances pulled to 60d nails with Brass washers stamped L.S. 1898 driven in the side center of Bearing trees.

Monument Stamped

T 11 S R35½E R36E	
S 1	S 6
S 12	S 7
1982 ORL.S. 1898	

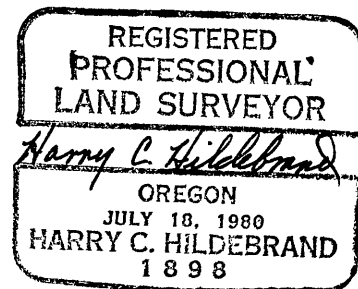

Office of..... Surveyor..... County of..... Grant.....
 State of..... Oregon..... I hereby certify that the within instrument was filed in this office
 for record on the 23 day of Nov., 1982
Robert D. Baggett by.....
 (COUNTY OFFICIAL) (DEPUTY)