


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

North 1/16th between sections 28 and 29 not previously established.

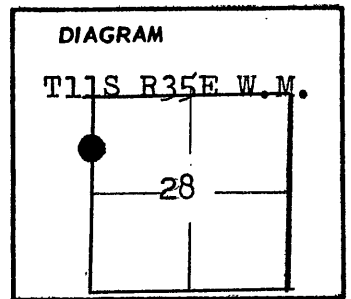

Description of corner evidence found:

Established N 1/16th corner on section line at point midway between the West 1/4 corner and the Northwest corner of section.

See Map of Survey No. 311.

Description of monument and accessories established to perpetuate the original location of this corner

Set a 1 1/2" x 30" iron pipe 20 inches in the ground with brass cap marked as shown.


from which NEW BEARING TREES:

A P.pine 6" diam., bears N7°W., 11.6 ft., marked N1/16 S29 CS BT.

A P.pine 13" diam., bears S.1°E., 0.8 ft., marked N1/16 S28 CS BT.

Raised a mound of stone, 3 ft. base to top of pipe.

Used compass with 20° East variation and a steel tape, measuring to a nail in a brass washer driven into BT blaze. Washer is marked " OPLS 598".

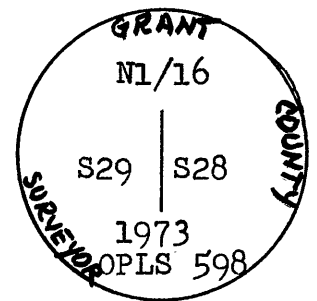

Office of County Surveyor County of Grant  
 State of Oregon, I hereby certify that the within instrument was filed in this office  
 for record on the 30th day of August, 1973, at 1:54 o'clock P.m., (signed)  
Robert D. Baggett County Surveyor by \_\_\_\_\_ (DEPUTY)  
 (COUNTY OFFICIAL)

Witnessed by Darlene Lemon  
August 30, 1973

