


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

T-5

History of original corner establishment:


Original corner established in 1881 by Robb & Graden.
Set 20x10x5 stone from which:
A 36" pine brs. N50°W 58 lvs.
A 12" pine brs. S70°E 184 lvs.

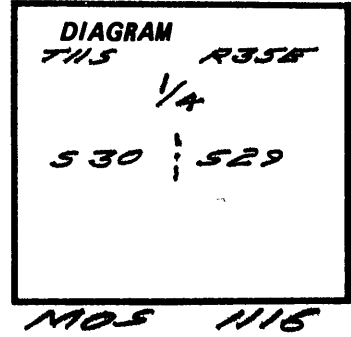

Description of corner evidence found: 20x10x7 stone, marked 1/4, in center of stone mound.
2 stumps with no markings match original BT calls closely.

Description of monument and accessories I established to perpetuate the original location of this corner: Set 2 1/4" x 30" aluminum pipe with 2 1/2" aluminum cap rising 10" in stone mound. Buried original stone alongside.
New BTs:
A 10" pp brs. N47°E 38.8' marked 1/4 529 BT
A 10" pp brs. N47°W 17.4' marked 1/4 530 BT

Cap marked
T115 R35E
1/4
530 | 529
1989
LS 1020

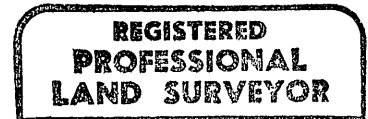

George W. Colvin, Jr.
OREGON
FEBRUARY 14, 1975
GEORGE W. COLVIN, JR.
1020

I hereby certify the above corner was perpetuated as described in Aug., 1989.

Office of County Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 1 day of Dec, 1989
Robert D. Gage by _____
(COUNTY OFFICIAL) (DEPUTY)

T-5