


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original survey by Herman D. Gradon  
Contract No. 383, dated March 26, 1881.

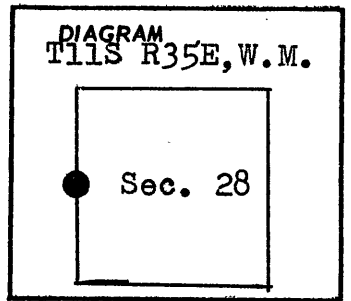

DESCRIPTION:

North between secs. 28 and 29.  
 40.00 set basalt stone 18x10x4 for  $\frac{1}{4}$  sec. cor.  
 from which  
 A pine 18 ins. diam., bears N62°E 29 lks. dist.  
 A " 36 " " " " N50°W 97 " "

Description of corner evidence found:

Found the original corner stone, a 18x10x3 inch basalt stone  
loosely set in a dim mound of stone.  
from which THE ORIGINAL BEARING TREES:

A P. pine stump, 16 ins. diam., bears N.62°E., 19.1 ft.,  
with no marks visible.


The remains of a P. pine stump., 36 ins. diam., bears N.46°W.,  
64.0 ft., no marks visible. This stump is badly burned.

See Map of Survey 311.

Description of monument and accessories I established to perpetuate the original location of this corner

At the corner point: Set a 1 $\frac{1}{2}$ "x12" iron pipe 6 " in the  
ground in 2 cu. ft. of concrete, anchoring the pipe to  
bedrock. Brass cap is marked as shown.  
from which NEW BEARING TREES:

A P. pine 16 ins. diam., bears N.53°E, 83.6 ft., mkd.  
 $\frac{1}{4}$  S28 CS BT.  
A P. pine 12 ins. diam., bears N.57°W, 87.8 ft., mkd.  
 $\frac{1}{4}$  S29 CS BT.

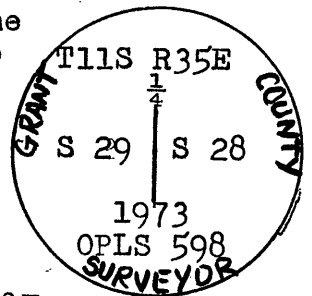

The corner of wire fences running West, South, and N12°E,  
bears West 2 ft.

I buried the original cor. stone East and alongside the iron  
pipe and raised a mound of stone 2 ft. high around the pipe.

Used compass with 20° East variation and steel tape, measuring to  
a nail in brass washer driven into BT blaze. Washer is marked  
"OPLS 598".

Office of County Surveyor County of Grant  
 State of Oregon, I hereby certify that the within instrument was filed in this office  
 for record on the 30th day of August, 1973, at 1:48 o'clock P.m., (signed)  
Robert D. Baggett  
 (COUNTY OFFICIAL) (DEPUTY)

Witnessed by  
Darlene Lemon August 30, 1973

