


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original survey by: Herman D. Graddon
Contract No. 383 dated March 26, 1881.

40.00 Set basalt stone 16x12x4 ins. for 1/4 sec. cor.
from which
A pine 16" diam., bears N65°E., 67 lks.
" " 18" " " N35°W., 42 " .

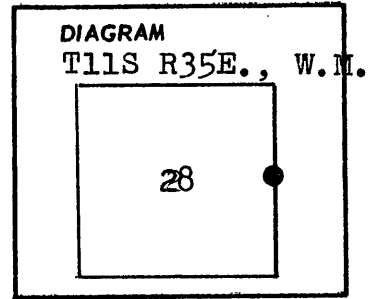

Description of corner evidence found:

Found original basalt stone 16x12x4 ins. marked 1/4 on West side and firmly set in a dim mound of stone.

from which, ORIGINAL BEARING TREE:

A dead and down pine stimp, 20 ins, diam., bears N65°E., 44.2 ft., with blaze. No scribing visible in the blaze.

See Map of Survey 311.


Description of monument and accessories I established to perpetuate the original location of this corner

At the corner point: Set a 1 1/2"x30" iron pipe 26" in the ground with brass cap marked as shown.

from which NEW BEARING TREES:

A P. pine 14 ins. diam., bears N50°E., 4.1 ft. mkd.
1/4 S27 CS BT.

A P. pine 16 ins. diam., bears N67°W., 2.0 ft., mkd.
1/4 S28 CS BT.

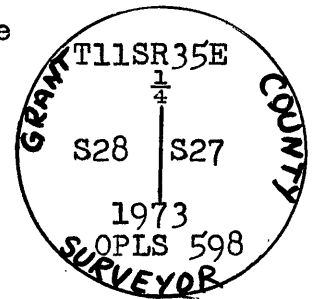

I buried the original cor. stone East and alongside the iron pipe, and raised a mound of stone to top of pipe.

Used compass with 20° E. variation and steel tape, measuring to nail in brass washer in BT blaze. Washer mkd. "OPLS 598".

This corner is 90 ft North of the corner of wire fences running South and West,

Office of County Surveyor Grant
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 30th day of August, 1973 at 1:47 o'clock P.m., (signed) Robert D. Bagett Co. Surveyor by (COUNTY OFFICIAL) (DEPUTY)

Witnessed by Darlene Lemon August 30, 1973

REGISTERED PROFESSIONAL LAND SURVEYOR

Robert D. Bagett OREGON JULY 12, 1963 ROBERT D. BAGETT 598