


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original survey by Herman D. Gradon.
Contract No. 383, dated March 26, 1881.

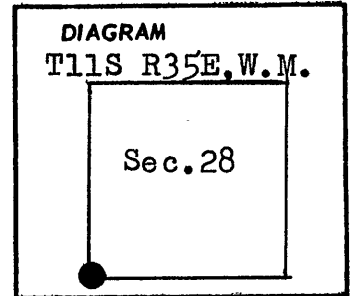

DESCRIPTION:

North between secs. 32&33.

69.50 Road from Prairie City to Baker City.

75.00 A road, course NW.

80.00 Set a basalt stone 12x8x6 for cor to secs 28, 29, 32, & 33, from which

A pine	10	ins.	diam.,	bears	N70°E	90	lks.	dist.	
"	"	44	"	"	"	S65°E	103	lks	"
"	"	36	"	"	"	S60°W	53	"	"
"	"	40	"	"	"	N35°W	30	"	"

Description of corner evidence found:

The original corner stone was not found. The position of this corner was determined by calls to the road 10.50 chs. south and to the creek 23.52 chs. east of the corner. This position falls in a mound of stone in a meadow and is harmoniously related to other found corners in the area. Calls to topog taken from GLO notes. There is no remaining evidence of the original bearing trees.

See Map of Survey No. 311.

Description of monument and accessories I established to perpetuate the original location of this corner

At the corner point: Set a 1 1/2" x 30" iron pipe 27 ins. in the ground with brass cap marked as shown.


from which NEW BEARING TREES:

A P. pine 40 ins. diam., bears S. 56° E., 193.5 ft., marked T11S R35E S33 CS BT.

A lodgepole pine, 10 ins. diam., bears S. 4° W., 460.0 ft., marked T11S R35E S32 CS BT.

Raised a mound of stone around the pipe.

Used compass with 20° East variation, and steel tape, measuring to nail in a brass washer driven into the BT blaze. Washer is marked " OPLS 598 ".

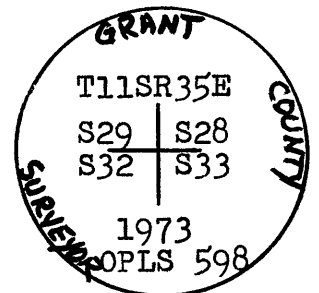

Office of County Surveyor County of Grant
Oregon
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 30th day of August, 1973, at 1:50 o'clock P. m., (signed)
Robert D. Bagett County Surveyor
(COUNTY OFFICIAL) (DEPUTY)

Witnessed by Darlene Lemon August 30, 1973

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598