


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Z-7

History of original corner establishment:

*Original corner established in 1881
by Robb & Graden.*

Set 14x8x5 stone.

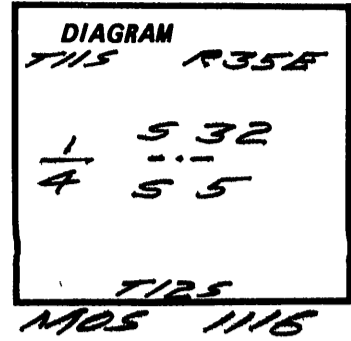


Description of corner evidence found: *Searched for, not found.
Established corner position by single proportion.*

Description of monument and accessories I established to perpetuate the original location of this corner: *Set 2 1/4" x 30" aluminum pipe with 2 1/2" aluminum cap rising 14" in stone mound.*

Cap marked

*BTs
17" PP b/s, N 35° W 62.5'
marked 1/4 532 BT
16" PP b/s, S 65° W 33.3'
marked 1/4 55 BT*



**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

George W. Colvin

OREGON
FEBRUARY 14, 1975
GEORGE W. COLVIN, JR.
1020

*I hereby certify the above corner
was established as described
in Oct. 1989.*

Office of County Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 14th day of Dec, 1989
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)

Z-7