


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by William R. Gradon under contract number 409 dated March 28, 1882.

The government field notes state:

- 36.75 Set a basalt stone 12 x 12 x 10 ins 8 ins in the ground for 1/4 sec. cor. marked 1/4 on N face, from which
A pine 16 ins diam. bears N45°E. 44 lks dist. marked 1/4S B.T.
A pine 7 ins diam. bears S5°W 14 lks dist. marked 1/4S B.T.

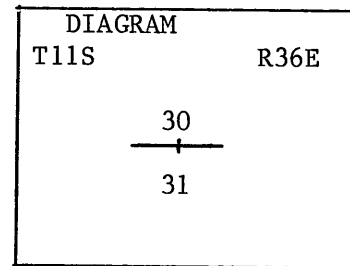

Description of corner evidence found:

I did not find the original corner stone. I re-establish the corner from the one remaining original bearing tree. From the corner point:

A 23" DBH PP bears N45 E°44 lks. (to face) scribed 1/4S BT.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 30" long 2-1/2" dia. aluminum pipe with 3-1/4" cap marked:
14" in ground & erected a mound of stones around it.

from which I scribe NEW BEARING TREES:

- A 25" DBH PP bears S24°E 106.3 ft., scribed 1/4 S31 BT.
A 12" DBH White fir N49°W 67.5 ft., scribed 1/4 S30 BT.

U.S. DEPT.
OF AGRICULTURE
UNLAWFUL TO DISTURB
T11S R36E

1/4 S30
S31
OPLS 1805
1979
CADASTRAL SURVEY
FOREST SERVICE

I painted faces & bands around BT's red & attached BT & Attention tags & nailed a brass washer to the new BT blaze marked PLS 1805.

I drove a 6 Ft. long steel fence post 2 Ft. in ground 6 Ft. N of corner & attached an attention tag to it.

I used a steel tape & magnetic staff compass with 20° East variation, measuring to the center of the new BT's.

This corner was set November 19, 1979.

Witness: F.R. Palmer, S. Anderson & L.R. Nevill

Office of County Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed
in this office for record on the 4 day of Feb, 19 80
Robert D. Bayett by _____
(COUNTY OFFICIAL) (DEPUTY)

