



CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
NONE

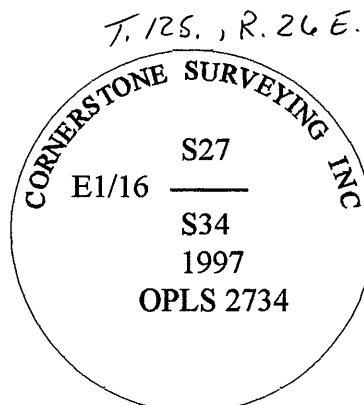

Description of corner evidence found:
NONE

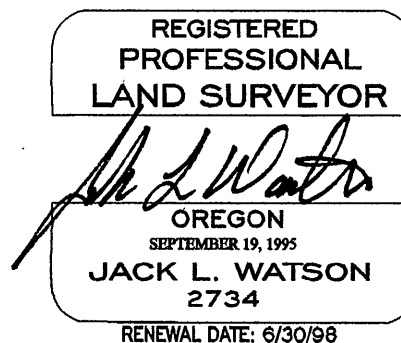

See Record Map of Survey No. 1443.

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x 30" iron pin with attached 2" aluminum cap, driven 28 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I set reference monuments:

A 5/8"x30" iron pin bears N74°E, 29.86 feet, with attached red plastic cap marked CORNERSTONE SURVEYING, Inc.

A 5/8"x30" iron pin bears S17°W, 23.05 feet, with attached red plastic cap marked CORNERSTONE SURVEYING, Inc.

I used a steel tape and magnetic compass, with 20° E. declination, to tie references.

Date: June 9, 1997

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 23 day of July, 1997.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)