


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by : Jason Owen, Deputy Surveyor
under Contract No. 194 dated July 1, 1873.

Surveyor General Record States: Set stone 14x12x6 on right bank of
John Day River for corner to sections 26,27,34, and 35.

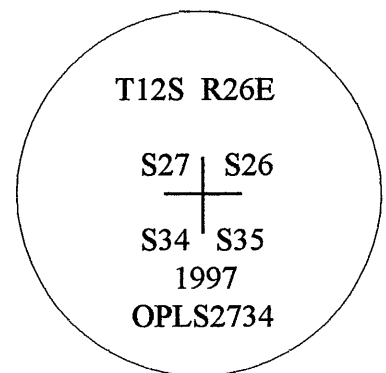

Description of corner evidence found:

I found no evidence of this corner, the position falls in a plowed field and the John Day River is
now far to the south of the corner position.

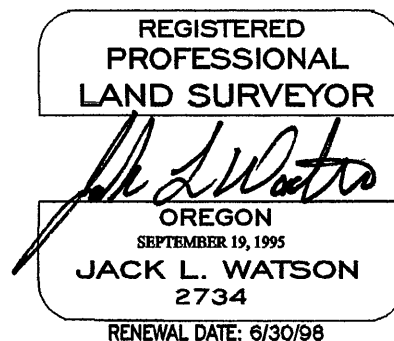

See Record Map of Survey No. 1443.

Description of monument and accessories set at corner location:

I established this corner at double proportionate distance between the found corners 1/2 mile
north and south and the found corners 1 mile east and west. At the corner position I set a
2 1/2" x 30" aluminum pipe with attached 2 1/2" aluminum cap, set 35 inches in the ground.
The cap is stamped as shown in the diagram.

From which I set new references:

A 5/8"x30" iron pin bears N70°E, 26.66 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING, Inc.

A 5/8"x30" iron pin bears S47°E, 24.68 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING, Inc.

A 5/8"x30" iron pin bears S44°W, 15.74 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING, Inc.

A 5/8"x30" iron pin bears N44°W, 15.06 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING, Inc.

I used a steel tape and magnetic compass, with 20° E. declination to tie references.

Date: June 9, 1997

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 23 day of July, 1997.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)