


CORNER RESTORATION

CORNER: N1/4 SEC. 36 TWP. 12 S. RANGE 26 E.

ORIGINAL SURVEY BY: Jason Owen, U.S. Deputy Surveyor

CONTRACT NUMBER: 194

DATE APPROVED: July 1, 1873

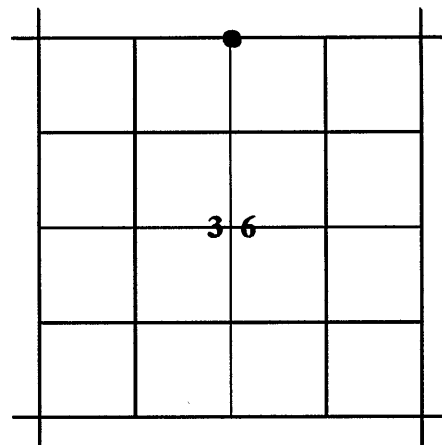

Subsequently established by Vernon Glaze, Grant County Surveyor in 1914. See Survey No. 7G

ORIGINAL DESCRIPTION: "Set Stone 11x9x8-10 in ground for 1/4 Sec. cor." Record Map of Survey No. 7G states: "Est 1/4 common cor Sec 25-36 set iron post with Brass cap marked and wooden post 4x4x4 scribed Set rock marked 1/4C.S. erected monument of stone..."

RESTORATION BY, STAMP AND DATE:

M.C. Springer, PLS
J.L. Hatfield, PLS

RECEIVED AND
FILED

May 13, 2009
OFFICE OF COUNTY SURVEYOR

ATTEST:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 9, 2002
MICHAEL C. SPRINGER
#70918

EXPIRES: 6/30/2010

May 5, 2009

Grant County Surveyor

EVIDENCE FOUND: Found Glaze's 1" iron pipe with attached 2" brass cap, marked as shown below and properly oriented, set firmly in the ground and surrounded with a small mound of stone 1 foot north of a rock jack fence corner. Fences extend west, south and northeast. Old fence remains extend to the east. Also found a basalt stone 12"x12"x5" marked 1/4 on one face lying in the rock jack. I accept Glaze's brass cap monument as the position of the 1/4 section corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Glaze's brass capped iron pipe is firmly set and in good condition. I leave it at the corner point for the position of the 1/4 section corner. I placed the marked stone back into the rock jack.

From which I SCRIBE A NEW BEARING TREE:


An 8" diameter juniper bears S10°E, 49.4 ft., marked 1/4 S36 BT.

I also SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N53°22'41"E, 29.03 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 2009.

A 5/8"x30" iron pin, bears S48°23'30"W, 41.78 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 2009.

A 5/8"x30" iron pin, bears N45°05'39"W, 29.89 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 2009.

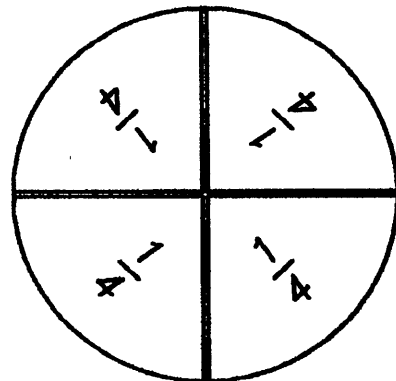

See Record Survey No. 1865 for Basis of Bearings. Used RTK GPS to measure the RPs. Used a magnetic compass with 17° East variation and a steel tape measuring to a 50d nail driven in the side-center at the root crown of the tree. Attached a BT tag to the tree.

STATE PLANE COORDINATES: (3601 OR N) Reference Datum: NAD83

Northing: 302,001.80 (US Survey feet)

Easting: 8,452,268.52 (US Survey feet)