


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner originally established by William R. Gradon under GLO contract number 497, dated March 7, 1884. Surveyor General record states:

Set a basalt stone 24x8x6 ins 16 ins in the ground for corner to Secs 1-2-11 & 12 marked with 5 notches on S and 1 notch on N edges from which:

A pine 30 in diam bears N50°E 19 lks dist marked T12SR28ES1BT
A pine 20 in diam bears S40°E 25 lks dist marked T12S R28ES12BT
A pine 18 in diam bears S60°W 30 lks dist marked T12SR28ES11BT
A pine 6 in diam bears N20°W 40 lks dist marked T12SR28ES2BT

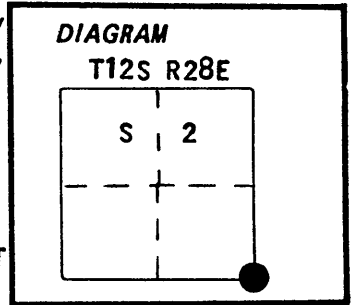

Corner was found by Howard Taylor in 1957. His notes state:
Found marked stone 16x8x6 in mound. We scribed:

12" Jun S61°E 35.0 ft. S12 BT

9" Pine S35°W 16.6 ft. S11 BT

16" Pine N32°E 18.0 ft. S1 BT No trees in Northwest quadrant

No record of subsequent monumentation was found in the Grant County records

Found stone 17x11x7 with marks visible in mound of stone

Found Taylor BTs Live and vigorous as follows:

A 14 inch diameter P.Pine bears N32°E 18.0 feet marked S1 BT

A 12 inch diameter Juniper bears S61°E 35.5 feet marked S12 BT (35.0 ft. by Taylor)

A 10 inch diameter P.Pine bears S35°W 17.4 feet marked S11 BT (16.6 by Taylor)

See map of survey dated January, 1985

Description of monument and accessories I established to perpetuate the

original location of this corner: In place of stone, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 20 inches in the ground, from which:

New BTs

A 8 inch diameter Juniper bears N13°W 47.0 feet marked T12S R28E S2 BT

Added BT blaze and scribe and brass washer marked OPLS 644 to Taylor BTs


Buried the original stone South and alongside of the monument

Raised mound of stone around monument

Set steel fencepost approximately 5 feet North with 54-4 sign

Corner set October 13, 1984

Witnesses: Greg Blackman and Rick Robinson

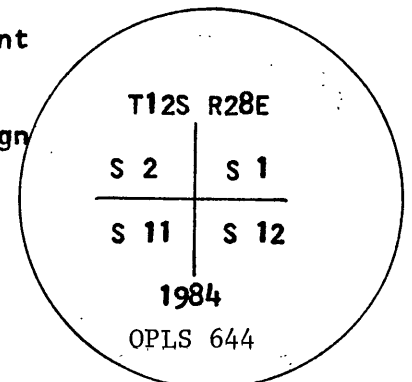

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane L. Griffith

OREGON
JULY 10, 1964
DUANE L. GRIFFITH
844

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 11 day of June, 1985
Robert L. Griffith by _____
(COUNTY OFFICIAL) (DEPUTY)