


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner originally established by W.N. Byars under GLO contract number 185, dated May 7, 1873. Surveyor General notes state: Set corner to Secs 1,6,7 & 12. A stone cone shaped 18x8x8



Corner was found by Howard Taylor in 1958. His notes state: Found marked original stone 18x8x8 in mound and scribed new BTs;

7" Juniper S35°W 41.7 ft. S12 BT

28" leaning pine S72°E 28.2 ft. S7 BT

No other tree within reason. Corner is near East edge of flattish gentle East slope

No record of subsequent remonumentation was found in the Grant County records
Description of corner evidence found:

Found stone 19x9x9 marked with notches in a mound of stone. Stone was conical shaped as described in the original GLO notes.

Found Taylor BTs as follows:

28 inch diameter P.Pine, dead, bears S70°E 30.1 feet marked S7 BT

11 inch diameter Juniper, live and vigorous, bears S37°W 40.4 feet marked S12 BT

See map of survey dated January, 1985

Description of monument and accessories I established to perpetuate the original location of this corner: In place of the stone, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 26 inches in the ground, from which:

New BTs

A 14 inch diameter Juniper bears N77°E 59.7 feet marked T12S R29E S6 BT


A 13 inch diameter Red Fir bears S18°E 63.1 feet marked T12S R29E S7 BT

A 13 inch diameter Red Fir bears N11°W 52.8 feet marked T12S R28E S1 BT

Buried the original stone East and alongside of the monument
Raised mound of stone around monument

Set steel fencepost approximately 5 feet North with 54-4 sign
Corner set September 26, 1984

Witnesses: Greg Blackman and Rick Robinson

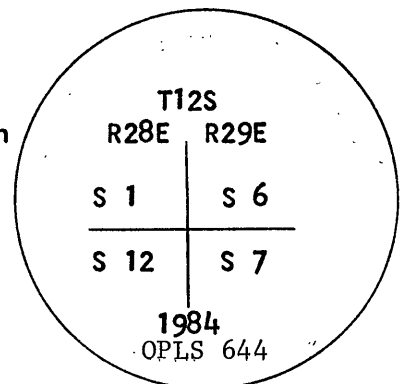

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Office of Survey County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 11 day of June, 1985
Robert D. Seibert by _____
(COUNTY OFFICIAL) (DEPUTY)