


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner originally established by William R. Graddon under GLO contract number 497, dated March 7, 1884. Surveyor General record states:

Set a basalt stone 14x8x8 ins 10 ins in the ground for ¼ Sec corner marked ¼ on Nface and raised a mound of stone alongside
Pits impracticable

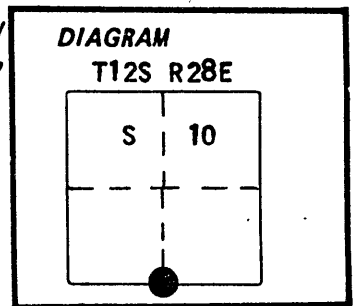

No record of subsequent remonumentation was found in the Grant County records
Description of corner evidence found:

NONE

See map of survey dated January, 1985

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate distance, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 15 inches in the ground, from which:

New BTs



A 17 inch diameter Juniper bears N85°E 38.0 feet marked ¼ S10 BT
A 18 inch diameter Juniper bears S43°E 23.9 feet marked ¼ S15 BT

Raised mound of stone around monument

Set steel fencepost approximately 5 feet West with 54-4 and 54-2 signs attached

Corner set October 21, 1984

Witnesses: Greg Blackman, Rick Robinson and Jeff Meyerholz

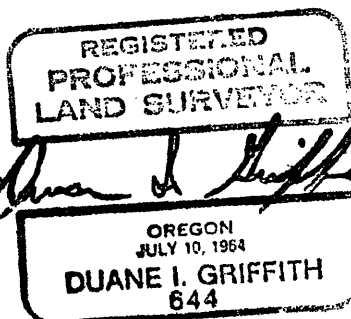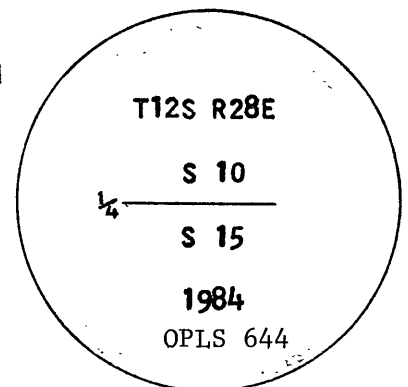

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*11*..... day of.....*June*....., 19*85*.....
.....*Duane I. Griffith*..... by.....
(COUNTY OFFICIAL) (DEPUTY)