


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Herman D. Gradon under GLO contract number 416, dated August 19, 1881. Surveyor General record states:

Set basalt stone 16x14x8 ins 12 ins in the ground for corner to Secs 11-12-13 and 14 marked with 4 notches on S and 1 notch on E edges from which;

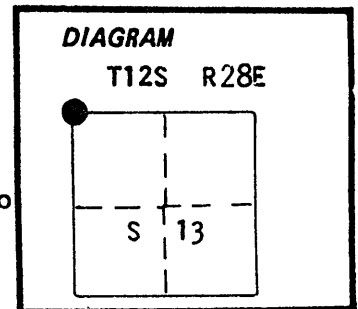

A pine 18 ins diam bears N60°E 25 lks dist marked T12S R28E S12 BT
 A pine 20 ins diam bears S40°E 40 lks dist marked T12S R28E S13 BT
 A pine 30 ins diam bears S70°W 15 lks dist marked T12S R28E S14 BT
 A pine 20 ins diam bears N50°W 30 lks dist marked T12S R28E S11 BT

No record of subsequent remonumentation was found in the Grant County Records.

Description of corner evidence found:

NONE

See map of survey dated January, 1985

Description of monument and accessories established to perpetuate the

original location of this corner: At proportionate position, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 22 inches in the ground, from which:
 New BTs

A 23 inch diameter P.Pine bears N10°W 52.6 feet with scribing chopped out
 A 6 inch diameter Juniper bears N31°E 40.6 feet marked T12S R28E S12 BT
 A 14 inch diameter P.Pine bears S25°E 49.2 feet marked T12S R28E S13 BT
 A 9 inch diameter P.Pine bears S38°W 45.3 feet marked T12S R28E S14 BT
 A 16 inch diameter Juniper bears N43°W 67.1 feet marked T12SR28ES11 BT

Raised mound of stone around monument



Set steel fenceposts approximately 5 feet East with 54-2 sign and approximately 5 feet West with 54-2 and 54-4 signs

Corner set May 16, 1985

Witnesses: Greg Blackman and Rick Robinson

NOTE:

This corner was originally set in October of 1984, but prior to filing the above mentioned survey, an error in the proportion was discovered. I moved the corner to the correct position at the above date. this is the reason for the chopped out BT and the cap being marked 1984

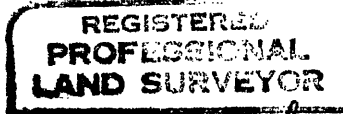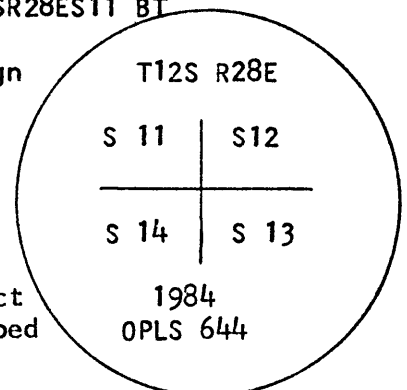

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 1985
 by.....
 (COUNTY OFFICIAL) (DEPUTY)