


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner originally established by W.N. Byars under GLO contract number 185, dated May 7, 1873. Surveyor General notes state:

Set corner to Secs 7, 12, 13 & 18, a stone 18x12x10

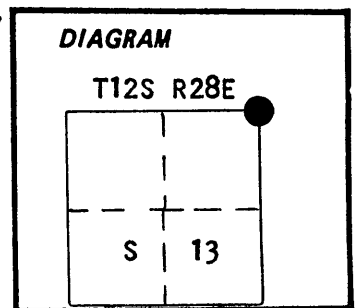

No record of subsequent remonumentation was found in the Grant County Records
Description of corner evidence found:

Found a stone 18x12x9 marked with 4 grooves alongside a mound of stone. (stone broken)

See map of survey dated January, 1985

Description of monument and accessories I established to perpetuate the original location of this corner: In place of the stone, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 16 inches in the ground, from which:

New BTs

A 14 inch diameter P.Pine bears N28°E 48.3 feet marked T12S R29E S7 BT
A 20 inch diameter P.Pine bears S67°E 36.8 feet marked T12S R29E S18 BT
A 12 inch diameter P.Pine bears S54°W 16.6 feet marked T12S R28E S13 BT
A 16 inch diameter Red Fir bears N68°W 25.5 feet marked T12S R28E S12 BT


Buried the original stone North and alongside of the monument
Raised mound of stone around monument

Set steel fenceposts approximately 5 feet South with 54-2 sign and approximately 5 feet East with 54-2 and 54-4 signs

Corner set October 9, 1984



I used a steel tape and magnetic compass in the establishment of these accessories. I used 13° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

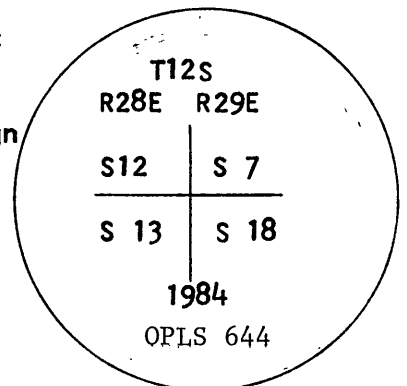

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the...*11*... day of...*June*..., 19...*85*..
.....*Robert H. Griffith*..... by
(COUNTY OFFICIAL) (DEPUTY)