


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not originally established

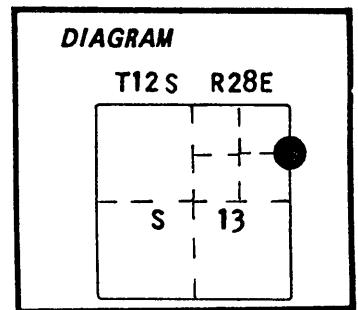

Description of corner evidence found:

NONE

Description of monument and accessories I established to perpetuate the original location of this corner: At the corner position, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 18 inches in the ground, from which:

New BTs


A 8 inch diameter Juniper bears N28°E 14.4 feet marked N1/16 S18 BT
A 7 inch diameter Mahogany bears S51°W 21.0 feet marked N1/16 S13 BT

Raised mound of stone around monument

Set steel fencepost approximately 5 feet North with 54-9 sign
Corner set October 14, 1984

Witness: Robert Bagett

Attached 54-2 sign to steel fencepost North

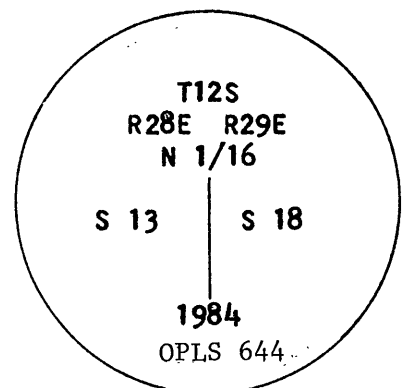

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*11*..... day of.....*June*....., 19.....*85*.....
.....*Robert D. Bagett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)