

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by: William Gradon, Deputy Surveyor, under Contract No. 497, dated March 7, 1884.

Surveyor General Record States: Set basalt stone 12x10x8 ins. 8 ins. in ground for corner to sections 16,17,20,21.



From which a Juniper 30" diam. bears S45°W, 23 lks marked T12SR28ES20BT.

Vernon Glaze found the original corner and set an iron pipe with brass cap, see Survey No. 7G. I found the iron pipe and brass cap out of the ground and leaning against a tree.



Description of corner evidence found:

I found a 23" Juniper marked T12SR28ES20BT in an open blaze. No evidence of the original corner stone was found.

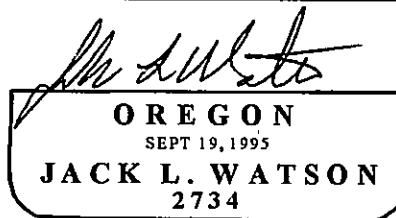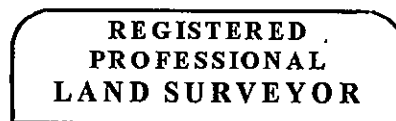

Renewal Date 6/30/2012

Description of monument and accessories set at corner location:

At record bearing and distance from the original bearing tree I set a 2½"x30" aluminum pipe with attached 3½" aluminum cap, surrounded by a mound of stone. The cap is stamped as shown in the diagram. From the corner monument:

A 23" Juniper bears S45°W, 15.18 feet to the face, marked T12SR28ES20BT. (Original BT)

I scribe new bearing trees:

A 8" Juniper bears N71°E, 104.1 ft., marked T12SR28ES16BT.

A 11" Juniper bears S15°E, 56.7 ft., marked T12SR28ES21BT.

A 23" Juniper bears N14°W, 53.3 ft., marked T12SR28ES17BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the new BT's and magnetic compass, with 16° E. declination.

Date: November 29, 2011

Office of CO. SURVEYOR County of _____
State of _____ I hereby certify that the within instrument was filed in this office
for record on the 13th day of DEC., 2011.
[Signature] by _____
(COUNTY OFFICIAL) (DEPUTY)