

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment: Corner originally established by William R. Graddon under GLO contract number 497, dated March 7, 1884. Surveyor General record states:

Set a basalt stone 16x10x6 ins 12 ins in the ground for corner to Secs 13-14-23 & 24 marked with 3 notches on S and 1 notch on E edges from which:

A pine 26 ins diam bears N10°E 8 lks dist marked T12SR28ES13BT
A pine 12 ins diam bears S10°E 68 lks dist marked T12SR28ES24BT
A pine 24 ins diam bears S45°W 80 lks dist marked T12SR28ES23BT
A fir 24 ins diam bears N40°W 135 lks dist marked T12SR28ES14BT

DIAGRAM

T12S R28E




Corner was remonumented by Vernon Glaze, Grant County Surveyor in 1914. His notes state:

Common corner 13-14-23-24 Gov cor with bearing trees. Set iron post brass cap marked wooden post 4x4x4.0' scribed erected monument of stone

No record of subsequent remonumentation was found in the Grant County records

Description of corner evidence found:

Found 1 inch diameter iron pipe with brass cap marked :
Found stone of called size with faint marks



Found a stump snag loose on ground with scribes visible at record bearing and distance for Northeast BT

Found a stump hole at the Southeast BT position

Found the Southwest BT dead and down, rotting with scribes visible at record bearing and distance

Found the Northwest BT dead and down, rotting with blaze evident at record bearing and distance

See map of survey dated January, 1985

Description of monument and accessories I established to perpetuate the

original location of this corner: In place of the brass cap monument, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which:

New BTs

A 12 inch diameter P.Pine bears N41°E 32.0 feet marked T12S R28E S13 BT

A 14 inch diameter Juniper bears S27°E 37.3 feet marked T12S R28E S24 BT

A 18 inch diameter Red Fir bears S47°W 32.4 feet marked T12S R28E S23 BT

A 14 inch diameter RedFir bears N65°W 23.8 feet marked T12S R28E S14 BT

Buried the original stone South and alongside of the monument


Buried the pipe monument of Glaze South and alongside monument

Raised mound of stone around monument

Set steel fencepost approximately 5 feet West with 54-4 sign

Corner set September 29, 1984

Witness: Rick Robinson

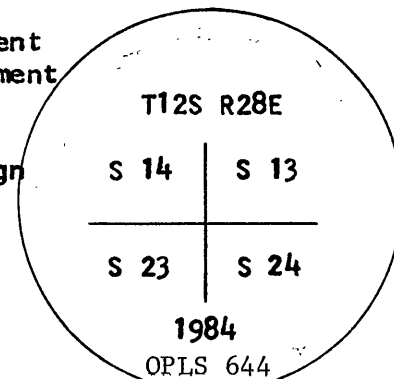

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 11 day of June, 1985
Rick Robinson by Duane I. Griffith
(COUNTY OFFICIAL) (DEPUTY)