


CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Not previously established



Description of corner evidence found:

Not previously established

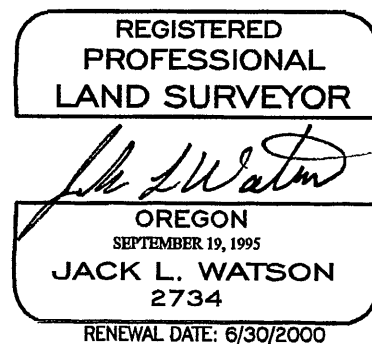

See Grant County Survey No. 1485.

Description of monument and accessories set at corner location:

At the position determined by survey, I set a 5/8"x30" iron pin with attached 2" aluminum cap, driven 28" into the ground, the cap is stamped as shown in the diagram.

From which I scribe new bearing trees:

A 9" Juniper bears N59°E, 17.77 feet, marked XBT.

A 16" Juniper bears S67°E, 36.77 feet, marked C1/4S28BT.

A 12" Juniper bears S70°W, 12.28 feet, marked C1/4S28BT.

A 14" Juniper bears N65°W, 15.90 feet, marked C1/4S28BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 20° E. declination. Built a mound of stone around monument.

Date: July 6, 1998

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 15 day of JULY, 1998.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)