


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Not Previously Established



T12S, R28E, CS1/16 Sec. 28

Description of corner evidence found:  
Not Previously Established

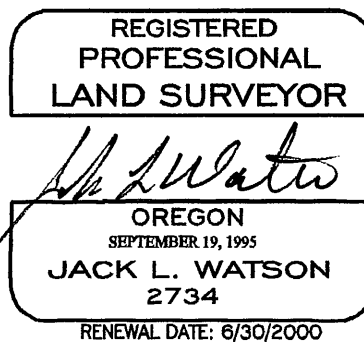

See Record Map of Survey No. 1488.

Description of monument and accessories set at corner location:

At the corner position determined by survey, I set a 5/8" x 30" iron pin with attached 2" aluminum cap, driven 24 inches in the ground, built mound of stone around pin. The cap is stamped as shown in the diagram.

From which I scribe a new bearing trees:

A 15" Juniper bears S25°E, 38.49 feet, marked CS1/16S28BT.

A 7" Juniper bears N82°W, 19.32 feet, marked CS1/16S28BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 20° E. declination.

Date: August 21, 1998

Office of SURVEYOR County of GRANT  
State of OREGON I hereby certify that the within instrument was filed in this office  
for record on the 26<sup>th</sup> day of Aug, 1998.  
Robert D. Raper by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)