

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Not Previously Established



T12S, R28E, S1/16 Sec. 27 & 28

Description of corner evidence found:

Not Previously Established

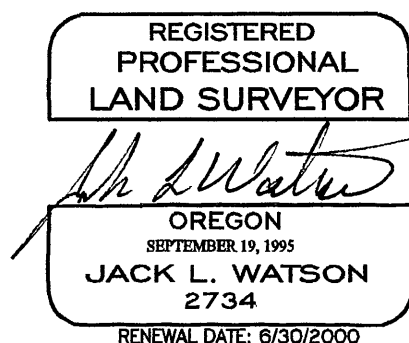

See Record Map of Survey No. 1488.

Description of monument and accessories set at corner location:

At the corner position determined by survey, I set a 5/8" x 30" iron pin with attached 2" aluminum cap, driven 26 inches in the ground, built mound of stone around pin. The cap is stamped as shown in the diagram.

From which I scribe a new bearing trees:

A 13" Juniper bears S6°W, 40.85 feet, marked S1/16S28BT.

A 11" Juniper bears S64°W, 17.74 feet, marked S1/16S28BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 20° E. declination.

Date: August 21, 1998

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 26th day of Aug, 1998.
Barbara D. Bisset by _____
(COUNTY OFFICIAL) (DEPUTY)