


CERTIFIED RECORD OF LAND CORNER MONUMENTATION
C1/4 Section 33, T12S, R28E, W.M.

History of original corner establishment:
NONE



Description of corner evidence found:
NONE

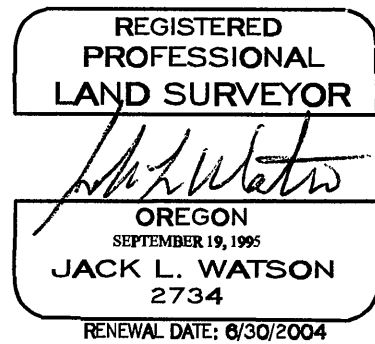

See Record Map of Survey No. 1695

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x30" iron pin with attached 2" aluminum cap, 24 inches in ground, built mound of stone to top of cap. The cap is stamped as shown in the diagram.

From which:

- A 5" Juniper bears N15°E, 22.7 feet, marked XBT.
- A 13" Juniper bears S73°E, 82.1 feet, marked C1/4S33BT.
- A 16" Juniper bears S58°W, 55.5 feet, marked C1/4S33BT.
- A 14" Juniper bears N50°W, 92.8 feet, marked C1/4S33BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination.

Date: April 2, 2004

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 15 day of APRIL, 2004.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)