


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner originally established by William R. Gradon under GLO contract number 497, dated March 7, 1884. Surveyor General record states:



Set a basalt stone 16x8x6 ins 10 ins in the ground for 1/4 Sec cor marked 1/4 on N face from which

A pine 14 ins diam bears N10°E 60 lks dist marked 1/4 S BT
A pine 12 ins diam bears S65°W 19 lks dist marked 1/4 S BT

No record of subsequent remonumentation was found in the Grant County records

Description of corner evidence found:

NONE

See map of survey dated January, 1985

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate distance, I set a 2 1/2 inch x 30 inch aluminum pipe with aluminum cap marked as shown, 20 inches in the ground, from which:


New BTs

A 15 inch diameter Juniper bears S24°W 47.3 feet marked 1/4 S18 BT
A 12 inch diameter double bole Juniper bears N24°W 14.7 feet marked 1/4 S7 BT

Raised mound of stone around monument

Set steel fenceposts approximately 5 feet West with 54-2 sign and approximately 5 feet East with 54-2 and 54-4 signs

Corner set October 22, 1984
Witness: Robert Bagett

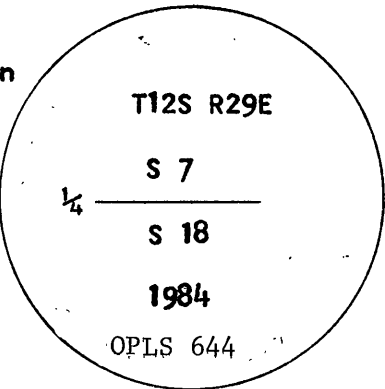

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*21* day of.....*June*....., 19..*85*.....
.....*Robert D. Bagett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)