


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner originally established by William R. Graddon under GLO contract number 497, dated March 7, 1884. Surveyor General record states:

Set a basalt stone 16x8x6 ins 10 ins in the ground for $\frac{1}{4}$ Sec cor marked $\frac{1}{4}$ on N face from which:

A pine 12 ins diam bears N60°E 18 lks dist marked $\frac{1}{4}$ S BT
A pine 40 ins diam bears S20°W 30 lks dist marked $\frac{1}{4}$ S BT

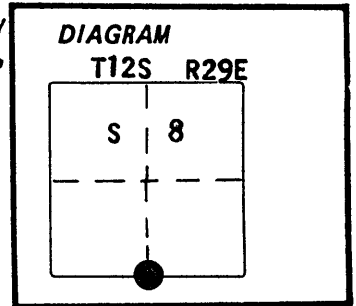

No record of subsequent remonumentation was found in the Grant County records

Description of corner evidence found:

NONE

See map of survey dated January, 1985

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate distance, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which;

New BTs

A 12 inch diameter White Fir bears S12°W 44.3 feet marked $\frac{1}{4}$ S17 BT
A 14 inch diameter White Fir bears N46°W 4.8 feet marked $\frac{1}{4}$ S8 BT

Raised mound of stone around monument


Set steel fenceposts approximately 5 feet West with 54-2 sign and approximately 5 feet East with 54-2 and 54-4 signs

Corner set October 22, 1984

Witness: Robert Baggett

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

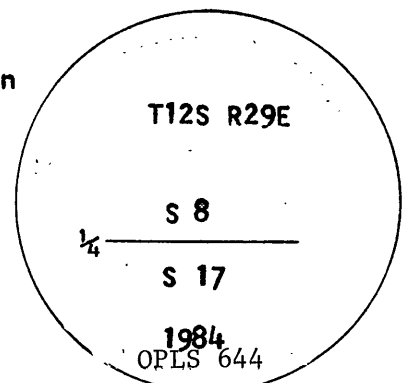

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Office of... *Surveyor* ... County of... *Grant* ...
State of... *Oregon* ... I hereby certify that the within instrument was filed in this office
for record on the... *5th* day of... *June* ... 19... *85* ...
... *Robert Baggett* by ...
(COUNTY OFFICIAL) (DEPUTY)