


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner originally established by William R. Graddon under GLO contract number 497, dated March 7, 1884. Surveyor General record states:

Set a basalt stone 24x10x4 ins 18 ins in the ground for cor to Secs 9,10,15 & 16 marked with 4 notches on the S and 3 notches on the E edges from which:



A pine 4 ins diam bears N45°E 29 lks dist marked T12S R29E S10 BT
 A fir 8 ins diam bears S40°E 36 lks dist marked T12S R29E S15 BT
 A fir 8 ins diam bears S65°W 27 lks dist marked T12S R29E S16 BT
 A fir 10 ins diam bears N20°W 13 lks dist marked T12S R29E S9 BT

No record of subsequent remonumentation was found in the Grant County records
 Description of corner evidence found:

Found marked stone 22x12x5 in mound of stone near fence corner

Found a 19 inch diameter Red Fir S40°E 23.8 feet, a stump with scribes visible
 Found a 16 inch diameter Red Fir S65°W 17.8 feet, dead and down with blaze evident
 Found a 24 inch diameter Red Fir N15°W 8.6 feet, blaze evident, live and vigorous

See map of survey dated January, 1985

Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:


New BTs

A 36 inch diameter P.Pine bears N37°E 50.4 feet marked T12S R29E S10 BT
 A 20 inch diameter White Fir bears S33°E 94.2 feet marked T12S R29E S15 BT
 A 14 inch diameter Tamarack bears S18°W 46.3 feet marked T12S R29E S16 BT

Buried the original stone East and alongside of the monument
 Raised mound of stone around monument

Set steel fencepost approximately 5 feet West with 54-2 and 54-4 signs attached

Corner set September 19, 1984
 Witnesses: Greg Blackman, Rick Robinson and Mike Wagner

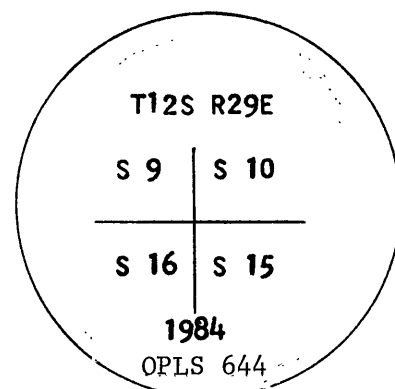

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
 State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
 for record on the.....*11* day of.....*June*....., 19.....*85*.....
Robert I. Griffith by.....
 (COUNTY OFFICIAL) (DEPUTY)