


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by William R. Gradon under
GLO contract number 497, dated April, 1884. Surveyor General
record states:

Set basalt stone 12x7x7 ins for $\frac{1}{4}$ sec cor from which;

A pine 12 in dia bears N20°E 38 lks dist
A pine 26 in dia bears S70°W 27 lks dist



No record of subsequent remonumentation found in Grant County survey records
Description of corner evidence found:

NONE

See map of survey dated July, 1985

Description of monument and accessories I established to perpetuate the
original location of this corner: At proportionate distance, I set a 2½ inch x 30 inch
aluminum pipe with aluminum cap marked as shown, 26 inches in the ground, from which;

New BTs


A 21 inch diameter P.Pine bears S59°E 51.8 feet marked $\frac{1}{4}$ S23 BT
A 11 inch diameter Juniper bears S37°W 19.5 feet marked $\frac{1}{4}$ S22 BT

Raised mound of stone around monument


Set steel fenceposts approximately 5 feet South with 54-2 sign
and approximately 5 feet North with 54-2 and 54-4 signs

Corner set June 26, 1985

Witnesses: Greg Blackman and Rick Robinson



I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distances to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

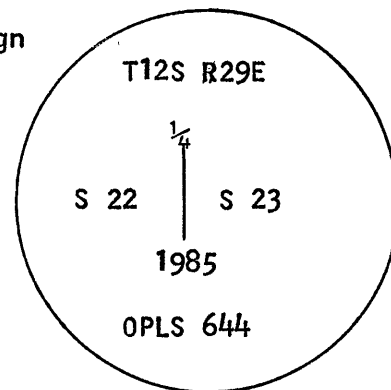

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 15 day of July, 1985
Robert D. Griffith by _____
(COUNTY OFFICIAL) (DEPUTY)