


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Samuel W. Lackland under
GLO contract number 415, dated August 19, 1881. Surveyor
General record states:

Set basalt stone 16x7x6 ins for $\frac{1}{4}$ sec cor from which;

A pine 20 in dia bears S55°E 19 lks dist
A pine 14 in dia bears S68°W 50 lks dist

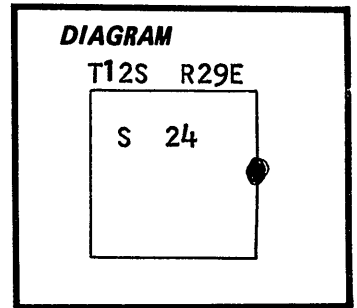

Description of corner evidence found:

Found stone of call size in a mound of stone with very faint marks

Found the Southeast BT, a 32 inch diameter P.Pine S45°E 12.5 feet. I opened and
found scribes. I find no sign of the Southwest BT

Description of monument and accessories I established to perpetuate the
original location of this corner: In place of stone, I set a 2½ inch x 30 inch aluminum pipe
with aluminum cap marked as shown, 26 inches in the ground, from which;

New BTs



A 14 inch diameter Red Fir bears N89°E 43.6 feet marked $\frac{1}{4}$ S19 BT
A 15 inch diameter Red Fir bears S57°W 17.3 feet marked $\frac{1}{4}$ S24 BT

Buried the original stone South and alongside of the monument

Raised mound of stone around monument

Set steel fenceposts approximately 5 feet South with 54-2 sign
and approximately 5 feet East with 54-2 and 54-4 signs

Corner set June 20, 1985

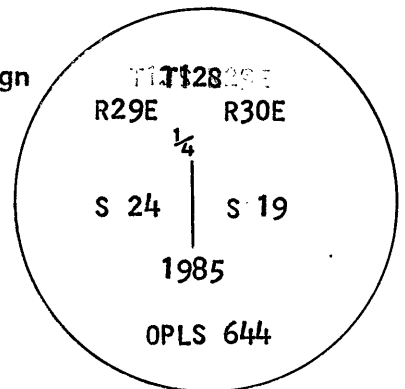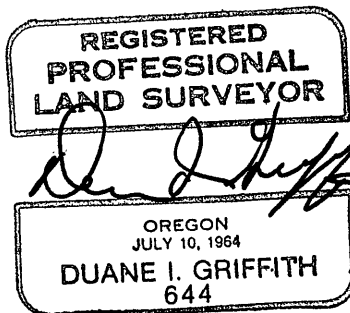

I used a steel tape and magnetic compass in the
establishment of these accessories. I used 20° East
magnetic declination and the distances to the BTs are
to the center of the tree. I set a brass washer marked
OPLS 644 at the BT blaze. I painted a 6 inch red band
around all BTs and attached 54-3 and 54-4 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*5*..... day of.....*July*....., 19*85*
Robert D. Sizeto by.....
(COUNTY OFFICIAL) (DEPUTY)