

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner originally established by William R. Gradon under
GLO contract number 497, dated April, 1884. Surveyor General
record states:

Set basalt stone 12x10x8 for $\frac{1}{4}$ sec cor from which;

A pine 28 in dia bears N60°E 34 lks dist

A pine 20 in dia bears S70°W 25 lks dist

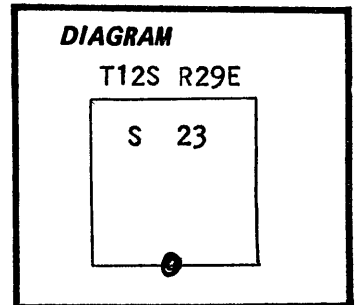

No record of subsequent remonumentation found in Grant County survey records
Description of corner evidence found:

Found scattered mound of stone, did not identify the corner stone

Found rotted remains of a P.Pine, roots only, N60°E 22.6 feet, no marks visible
Found a 30 inch diameter P.Pine snag S70°W 16.5 feet with the face burned out,
no marks visible

See map of survey dated July, 1985

Description of monument and accessories I established to perpetuate the
original location of this corner: At record bearing and distance from the above described BTs,
I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 20 inches
in the ground, from which;

New BTs


A 11 inch diameter double bole Juniper bears N36°E, 4.2 feet marked $\frac{1}{4}$ S23 BT
A 15 inch diameter Juniper bears S11°W 12.4 feet marked $\frac{1}{4}$ S26 BT

Raised mound of stone around monument

Set steel fencepost approximately 5 feet West with 54-4 sign

Corner set June 18, 1985

Witness: Greg Blackman

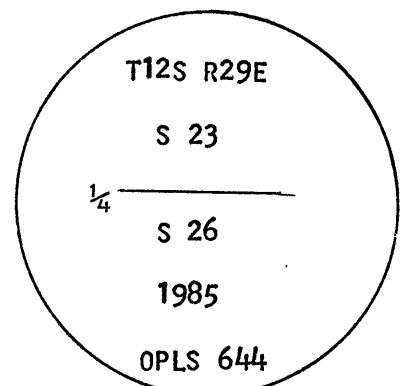

I used a steel tape and magnetic compass in the
establishment of these accessories. I used 20° East
magnetic declination and the distances to the BTs are
to the center of the tree. I set a brass washer marked
OPLS 644 at the BT blaze. I painted a 6 inch red band
around all BTs and attached 54-3 and 54-4 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*15* day of.....*July*....., 19.....*85*.....
.....*Robert D. Dwyer*..... by.....
(COUNTY OFFICIAL) (DEPUTY)