


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by: William R. Gradon, U.S. Deputy Surveyor, under Contract No. 497, dated March 7, 1884.


Surveyor General Record States: Set a basalt stone 14x8x6 inches, 9 inches in the ground for 1/4 section corner. Marked 1/4 on north face and raised a mound of stone alongside.

Survey No. B29, by L.E. Lucas, County Engineer, dated March 24, 1934, states: Found a 30" yellow pine tree with old scribing visible. Acceptable as witness for S1/4 corner Sec. 27.

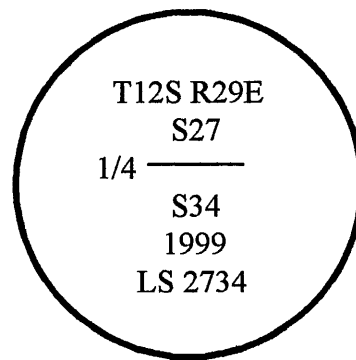

Description of corner evidence found:

I found no evidence of the original corner or the witness tree called for by Mr. Lucas.

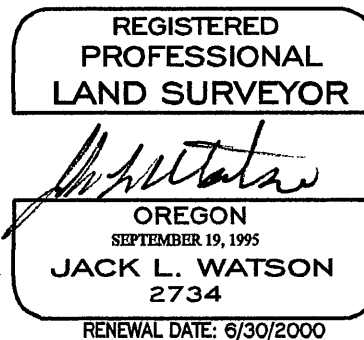

See Survey No. 1540

Description of monument and accessories set at corner location:

At single proportionate position I set a 2½"x30" aluminum pipe with attached 3" aluminum cap, 26 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I scribe new bearing trees:

- A 18" P. Pine bears S42°E, 54.36 feet, marked 1/4S34BT.
- A 6" Juniper bears S3°E, 22.18 feet, marked XBT.
- A 8" Juniper bears S66°W, 36.37 feet, marked XBT.
- A 12" Juniper bears N28°W, 33.00 feet, marked 1/4S27BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 20° E. declination.

Date: December 23, 1999

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 4 day of JAN, 1999, 2000
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)