


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Not previously established



CE1/16 Sec.34 T12S, R29E

Description of corner evidence found:

Not previously established

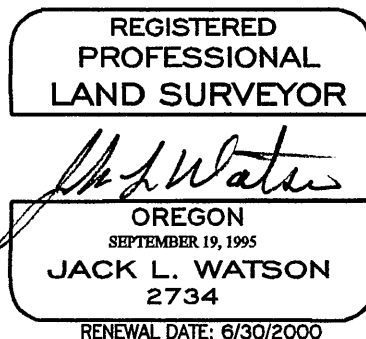

See Survey No. 1540

Description of monument and accessories set at corner location:

At the position determined by survey, I set a 5/8"x30" iron pin with attached 2" aluminum cap, the cap is stamped as shown in the diagram.

From which I scribe new bearing trees:

A 7" Juniper bears S10°E, 30.03 feet, marked CE1/16S34BT.

A 7" Juniper bears S60°W, 51.00 feet, marked CE1/16S34BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 20° E. declination.

Date: December 22, 1999

Office of SURVEYOR County of CLATSOP
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 4 day of JAN, 1999 2000
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)