


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
NOT PREVIOUSLY ESTABLISHED.

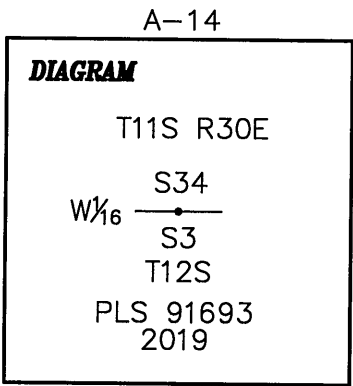

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE, NOT PREVIOUSLY ESTABLISHED.

DESCRIPTION OF MONUMENT AND ACCESSORIES | ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


SET STANDARD USFS 2 1/2"x30" ALUMINUM MONUMENT WITH 3 1/4" ALUMINUM CAP, 27" IN THE GROUND IN A COLLAR OF STONE AND PLACED A GRAY MAGNET AT THE BASE OF MONUMENT. CAP IS MARKED AS SHOWN IN CORNER DIAGRAM.

NEW REFERENCE MONUMENTS:
RM 1: A 1/2"x20" IRON ROD WITH 2" ALUMINUM CAP, BEARS N56°E, 29.3FT,
RM 2: A 1/2"x20" IRON ROD WITH 2" ALUMINUM CAP, BEARS S39°E, 22.3FT.

BEARINGS WERE TAKEN FROM A MAGNETIC COMPASS WITH 14° E. DECLINATION.
DISTANCES WERE MEASURED WITH A STEEL TAPE.

INSTALLED ALUMINUM GUARD POSTS SOUTH AND WEST OF MONUMENT ON THE PROPERTY LINES WITH 54-2 AND 54-9 SIGNS ATTACHED.

TYPICAL RM



RECREATIONAL GPS COORDINATES (NAD83):
N 44°33'30.4" W 119°05'53.0"
COORDINATES WERE OBTAINED FROM A GARMIN
RECREATIONAL GRADE GPS RECEIVER.

DATE: JULY 30, 2019
DECLINATION: 14° E
WITNESSES: REID KELLY
DOUGLAS CRAWFORD

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

OCT 1 2019
BY: [Signature]

REGISTERED
PROFESSIONAL
LAND SURVEYOR

[Signature]

OREGON
SEPTEMBER 11, 2018
ROBERT C. MOYERS
91693
RENEWS: 12/31/2020