

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. F-13

History of original corner establishment:

No corner monument was originally set.

DIAGRAM

T12S R30E

N 1/16

S9 + S10

Description of corner evidence found:

Description of monument and accessories I established to perpetuate the original location of this corner:

At surveyed point set 2 1/2" aluminum pipe with 3 1/4" aluminum cap stamped:

Set pipe 26" in ground with mound of stone and soil to cap.

Bearing trees:

A Ponderosa Pine 14" dia. bears N68°W. 9.4 ft. scribed N 1/16 S9 BT.


A Douglas Fir 12" dia. bears N51°E 30.0 ft. scribed N 1/16 S10 BT.

Attached 54-3 and 54-4 signs to both BT's and brass washer stamped LS 1294 to foot blaze of both BT's. Painted blazes and 6" band around both BT's red. Attached 54-2, 54-9 and 54-4 signs to metal post 3 ft. south of corner.

Magnetic Declination = 19°30'E

I hereby certify the above corner monument was established as herein described on August 12, 1981.

Witnesses: R. Orton
G. Orton
A. Hanley

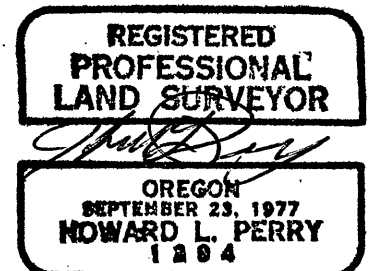

Office of.....County Surveyor.....County of.....Grant
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the.....6.....day of.....Aug....., 1982
Robert D. Baggett by.....
(COUNTY OFFICIAL) (DEPUTY)