


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Samuel W. Lackland under GLO contract number 415, dated August 19, 1881. Surveyor General record states:

Set a basalt stone 18x12x6 inches 12 ins in ground for cor to secs 7, 8, 17 and 18 marked with 4 notches on the South and 5 notches on the East faces, and raised a mound of stone alongside.

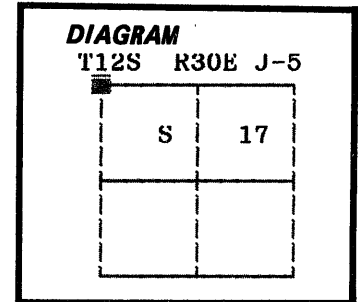

No record of subsequent monumentation found in Grant County survey records.
Description of corner evidence found:

Found a stone of 18x10x6 inches marked with 5 notches and 4 notches, rather dim marks, in a mound of stone.

See map of survey dated June, 1986. *SURVEY NO. 1027.*
Description of monument and accessories I established to perpetuate the

original location of this corner: In place of the stone, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which;

New Bearing Trees:

A 14 inch diameter Ponderosa Pine bears N60°E, 47.05 feet marked T12S R30E S8 BT
A 16 inch diameter Ponderosa Pine bears S28°E, 69.78 feet marked T12S R30E S17 BT
A 16 inch diameter Douglas Fir bears S38°W, 65.79 feet marked T12S R30E S18 BT
A 15 inch diameter Douglas Fir bears N6°W, 34.82 feet marked T12S R30E S7 BT
Raised a mound of stone around monument, 2 ft. base to top of cap.



Buried the found corner stone North and alongside of monument.

Painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Set a steel fencepost approximately 5 feet South with 54-2 sign attached and approximately 5 feet East with 54-4 and 54-2 signs attached.

I hereby certify that the above corner point was perpetuated as hereon described on June 10, 1986.

Witnesses: Greg Blackman and Rick Robinson



I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of.....*Surveyor*..... County of.....*GRANT*.....
State of.....*OREGON*....., I hereby certify that the within instrument was filed in this office
for record on the.....*19*..... day of.....*JAN*....., 19*88*
Robert D. Bager by.....
(COUNTY OFFICIAL) (DEPUTY)