

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original corner set by Samuel W. Lackland, under contract number 415, approved March 10, 1882.

Record states:

Set Basalt Stone 16x8x7 ins., 12 ins. in ground for ¼ Secs. Cor. marked with ¼ on W. face. Raised mound of stone 2 ft. high 4 ft. base alongside.

Township 12 South, Range 30 East
P-21

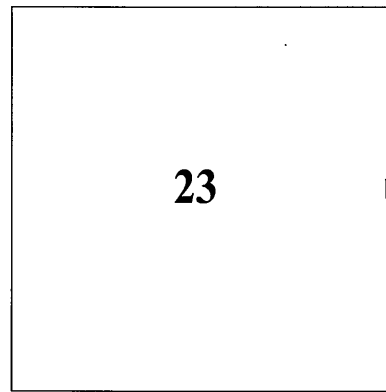

Subsequent survey:

Corner found by F. R. Palmer, Forest Service Survey Tech, as described by Forest Service Corner Card dated 4/21/1981.


Record states:

Lots and lots of stones in area. I find a group that looks like a mound with one stone 12x8x7 that appears to have a ¼ face up on West edge of mound.

The stones I am speaking of are 22 ft. west of a N-S fence with groups of stones at old rock jacks. There is a 37" ponderosa pine blazed N & S faces 160 ft N. of this group of stones with an old black and silver property boundary tag on the East face. I nailed and initialed that tag.

Description of evidence found:

Found basalt stone 12x8x7 faintly marked ¼ on West edge of a 4 ft. diam. stone mound. Stone mound lies 22 ft. West of a N-S fence and 160 ft. South of a 30 ins. ponderosa pine snag with blazed North and South faces and an old black and silver property boundary tag on the East face with F. R. Palmer initials dated 4/21/81.



Description of monument and accessories established to perpetuate the location of this corner.

At the position of the found original stone I set a 2 ins. x 30 ins. aluminum pipe, 24 ins. in the ground, with a 3½ ins. aluminum cap, stamped as shown in diagram. Deposited original stone alongside and raised a 4 ft. diam. stone mound to top.

New BTs

A juniper, 12 ins. diam., bears N. 13° E., 74.8 ft. dist., scribed ¼ S24 BT.

A ponderosa pine, 19 ins. diam., bears S. 75° E., 73.8 ft. dist., scribed ¼ S24 BT.

A juniper, 7 ins. diam., bears S. 12° E., 20.5 ft. dist., scribed X BT on double blaze.

A ponderosa pine, 10 ins. diam., bears N. 72° W., 23.5 ft. dist., scribed ¼ S23 BT.

Bearings are made with hand compass, declination 14° E.


I hereby certify that the above corner point
was perpetuated as herein described on
6/18/2021.

Witnessed by:

Matt Brockamp, PLS

Austin Brockamp

REGISTERED
PROFESSIONAL
LAND SURVEYOR

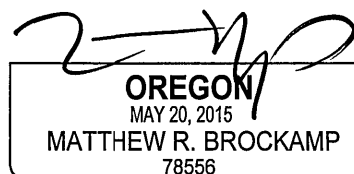

Registration expires 12/31/2021

BROCKAMP LAND SURVEYING, LLC

www.brockamplandsurveying.com

Matt Brockamp, PLS

541-398-0384

matt@brockamplandsurveying.com

P.O. Box 553

Wallowa, OR 97885

Full Service Land Survey Firm

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

NOV 29 2021

By: